


150W Single Output with PFC Function

- Universal AC input / Full range
- PF>0.98@115VAC; >0.95@230VAC
- Protections: Short circuit / Over load / Over voltage / Over temp.
- Cooling by free air convection
- High power density 8.4W/in³
- No load power consumption<1W
- 100% full load burn-in test
- 3 years warranty

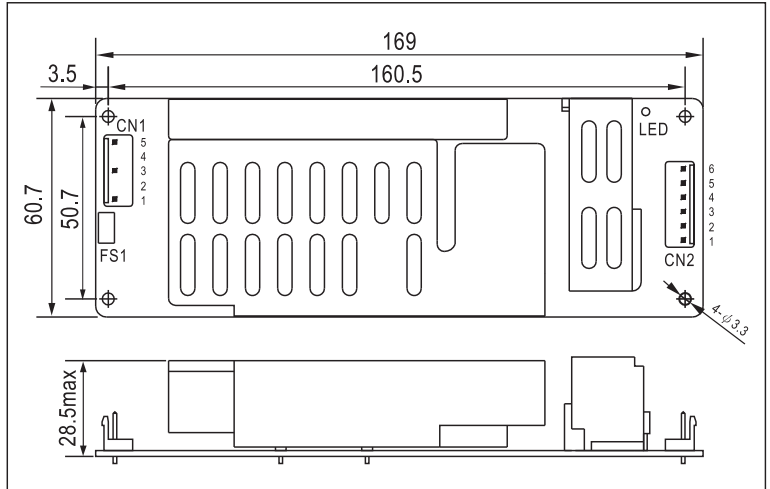

- AC input voltage range90~264VAC ; 127~370VDC
- DC adjustment range Can be modified between $\pm 10\%$ rated output voltage by factory
- Overload protection 105%~135% hiccup mode, auto-recovery
- Over voltage protection 110%~135% rated output voltage
- Withstand voltage I/P-O/P: 4.25kVDC, I/P-FG:1.5kVAC, 1minute
- Working temperature 0~40°C@100%, -20°C@80%, 60°C@60% load
- Safety standards UL60950-1 approved
- EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204
- Connection 5+6P / 3.96mm pitch, JST P/N :B5P / B6P-VH
- Packing 0.32kg ; 48pcs / 15.8kg / 0.79CUFT

Model No.	Output	Tol.	R&N	Effi.
ASP-150-12	12V, 0~11A	$\pm 2\%$	150mV	88%
ASP-150-15	15V, 0~9.5A	$\pm 2\%$	180mV	88%
ASP-150-20	20V, 0~7.5A	$\pm 1\%$	200mV	90%
ASP-150-24	24V, 0~6.3A	$\pm 1\%$	240mV	90%
ASP-150-48	48V, 0~3.2A	$\pm 1\%$	240mV	89%