



Test Report: ELGC-300-M

300W Constant Power MODE LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

Environment Test




DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CURRENT TOLERANCE	±5%	I/P: 100 VAC / 305 VAC O/P: FULL/ MIN LOAD Ta: 25°C	<±5%
2	CONSTANT CURRENT REGION	58 V~ 116 V	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	35 V~ 116 V
3	OPEN CIRCUIT VOLTAGE (max.)	120 V	I/P: 230 VAC O/P: NO LOAD	115V
4	CURRENT RIPPLE	5.0% max. @rated current	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	3.88%
5	CURRENT ADJ. RANGE	1.3A~4.0A	I/P: 230 VAC O/P: TESTING Ta: 25°C	1.15A~4.4A
6	CONSTANT POWER	O/P: 301.6W	I/P: 230 VAC O/P: Vo×Io	TEST: OK
7	SET UP TIME(Max)	500ms/115VAC 500ms/230VAC	I/P: 115 VAC I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	296 ms/115 VAC 304 ms/230 VAC


INPUT=115VAC/50HZ @ FULL LOAD

CH1: Output Voltage CH2: AC Input Voltage

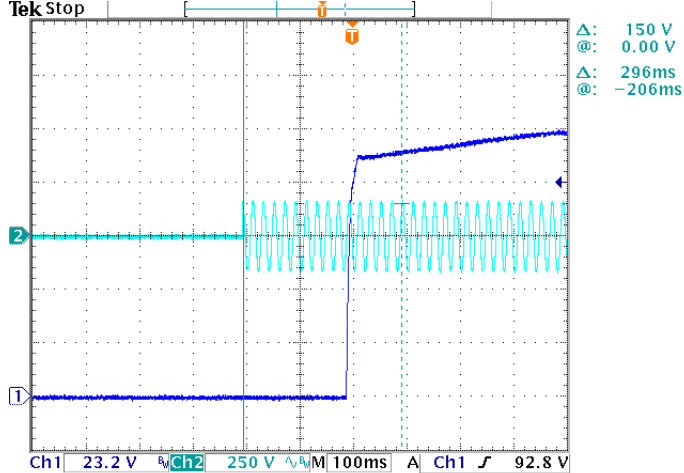

INPUT=230 VAC/50HZ @ FULL LOAD



CH1: Output Voltage CH2: AC Input Voltage

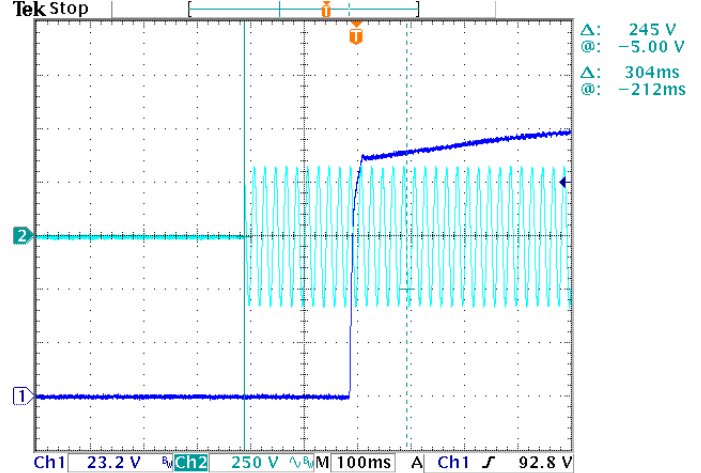



8 DIMMING OPERATION (for AB-Type)

- ※ 3 in 1 dimming function(for B-Type)
 - Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance.
 - Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
 - Dimming source current from power supply: 100 μ A (typ.)



Ⓒ Applying additive 0 ~ 10VDC

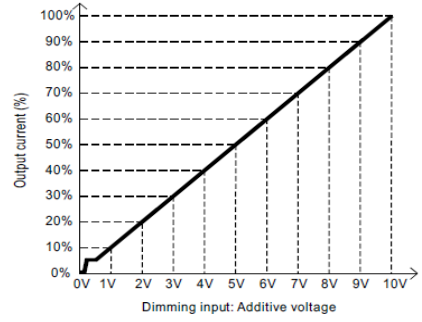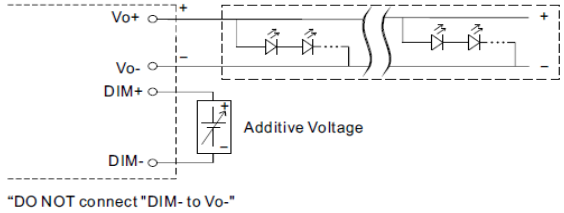

Ⓒ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

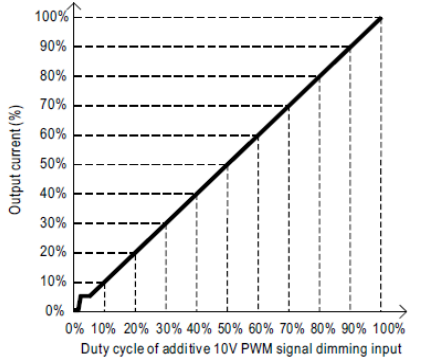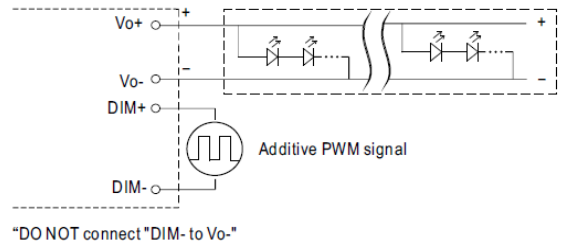

Ⓒ Applying additive resistance:

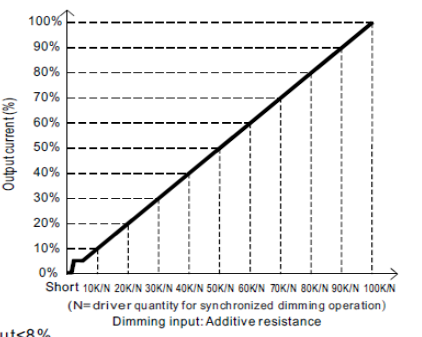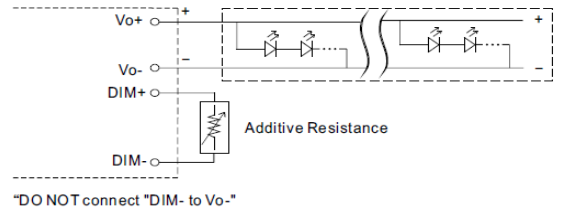

Note : 1. Min. dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.
 2. The output current could drop down to 0% when dimming input is about 0k Ω or 0Vdc, or 10V PWM signal with 0% duty cycle.

I/P: 230 VAC
 O/P: DIMMING TEST
 Ta: 25 $^{\circ}$ C

1	DIMMING	Short	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
	Output Current	0	0.5000A	0.8650A	1.2400A	1.6100A	1.9800A	2.4200A	2.8600A	3.2400A	3.6500A	4.0000A	4.0000A
%	0%	12.50%	21.63%	31.00%	40.25%	49.50%	60.50%	71.50%	81.00%	91.25%	100.00%	100.00%	
2	PWM	0V	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
	Output Current	0	0.4375A	0.8000A	1.2300A	1.6100A	2.0400A	2.4400A	2.8500A	3.2500A	3.6600A	4.0100A	4.0150A
%	0%	10.94%	20.00%	30.75%	40.25%	51.00%	61.00%	71.25%	81.25%	91.50%	100.25%	100.38%	
3	R	0%	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	OPEN
	Output Current	0	0.4300A	0.8000A	1.2400A	1.6100A	2.0400A	2.4200A	2.8000A	3.2400A	3.6500A	4.0000A	4.0000A
%	0%	10.75%	20.00%	31.00%	40.25%	51.00%	60.50%	70.00%	81.00%	91.25%	100.00%	100.00%	

TEST RESULT: OK
 TEST RESULT: OK

9 DIMMING OPERATION (for DX-User definition)


- ※ DALI Interface (primary side; for DA-Type)
 - Apply DALI signal between DA+ and DA-.
 - DALI protocol comprises 16 groups and 64 addresses.
 - First step is fixed at 8% of output.

TEST RESULT: OK

※ Smart timer dimming function

MEAN WELL Smart timer dimming primarily provides the adaptive proportion dimming profile for the output constant current level to perform up to 14 consecutive hours. 3 dimming profiles hereunder are defined accounting for the most frequently seen applications. If other options may be needed, please contact MEAN WELL for details.

Ex: ☉ D01-Type: the profile recommended for residential lighting

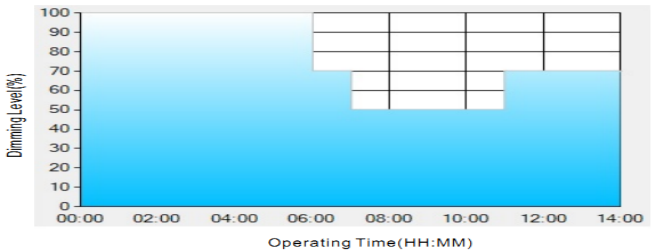

Set up for D01-Type in Smart timer dimming software program:

	T1	T2	T3	T4
TIME**	06:00	07:00	11:00	---
LEVEL**	100%	70%	50%	70%


** TIME matches Operating Time in the diagram whereas LEVEL matches Dimming Level.

Example: If a residential lighting application adopts D01-Type, when turning on the power supply at 6:00pm, for instance:

- [1] The power supply will switch to the constant current level at 100% starting from 6:00pm.
- [2] The power supply will switch to the constant current level at 70% in turn, starting from 0:00am, which is 06:00 after the power supply turns on.
- [3] The power supply will switch to the constant current level at 50% in turn, starting from 1:00am, which is 07:00 after the power supply turns on.
- [4] The power supply will switch to the constant current level at 70% in turn, starting from 5:00am, which is 11:00 after the power supply turns on.

The constant current level remains till 8:00am, which is 14:00 after the power supply turns on.

Ex: ☉ D02-Type: the profile recommended for street lighting

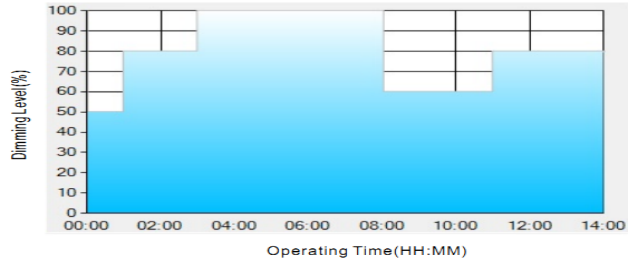

Set up for D02-Type in Smart timer dimming software program:


	T1	T2	T3	T4	T5
TIME**	01:00	03:00	8:00	11:00	---
LEVEL**	50%	80%	100%	60%	80%

** TIME matches Operating Time in the diagram whereas LEVEL matches Dimming Level.

Example: If a street lighting application adopts D02-Type, when turning on the power supply at 5:00pm, for instance:

- [1] The power supply will switch to the constant current level at 50% starting from 5:00pm.
- [2] The power supply will switch to the constant current level at 80% in turn, starting from 6:00pm, which is 01:00 after the power supply turns on.
- [3] The power supply will switch to the constant current level at 100% in turn, starting from 8:00pm, which is 03:00 after the power supply turns on.
- [4] The power supply will switch to the constant current level at 60% in turn, starting from 1:00am, which is 08:00 after the power supply turns on.
- [5] The power supply will switch to the constant current level at 80% in turn, starting from 4:00am, which is 11:00 after the power supply turns on. The constant current level remains till 6:30am, which is 14:00 after the power supply turns on.

Ex: ☉ D03-Type: the profile recommended for tunnel lighting

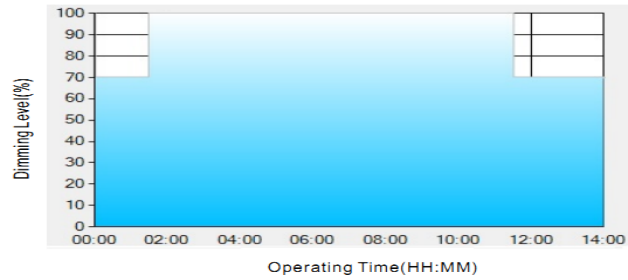

Set up for D03-Type in Smart timer dimming software program:

	T1	T2	T3
TIME**	01:30	11:00	---
LEVEL**	70%	100%	70%

** TIME matches Operating Time in the diagram whereas LEVEL matches Dimming Level.

Example: If a tunnel lighting application adopts D03-Type, when turning on the power supply at 4:30pm, for instance:


- [1] The power supply will switch to the constant current level at 70% starting from 4:30pm.
 - [2] The power supply will switch to the constant current level at 100% in turn, starting from 6:00pm, which is 01:30 after the power supply turns on.
 - [3] The power supply will switch to the constant current level at 70% in turn, starting from 5:00am, which is 11:00 after the power supply turns on.
- The constant current level remains till 6:30am, which is 14:00 after the power supply turns on.

TEST RESULT: OK

MEAN WELL
2018/10/2
ISSUE

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~305 VAC	I/P: TESTING O/P: FULL LOAD (PLEASE CHECK DERATING CURVE) Ta: 25°C	87V~305 V
			I/P: LOW-LINE-3V=87 V HIGH-LINE+10V=315 V O/P: FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 90 VAC ~305 VAC O/P: FULL~NO LOAD Ta: 25°C	TEST: OK
3	AC CURRENT	115VAC/ 3.0 A 230 VAC/ 1.6 A 277 VAC/ 1.3 A	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	I=2.844A/ 115VAC I = 1.402A/ 230VAC I = 1.214A/277VAC
4	LEAKAGE CURRENT	< 0.75mA / 277VAC	I/P: 277 VAC O/P: NO LOAD Ta: 25°C	L-FG: 0.283mA N-FG: 0.274mA
5	STANDBY POWER CONSUMPTION	<0.5W for A/B/DA-Type	I/P: 230VAC O/P: NO LOAD/STANDBY Ta: 25°C	0.37W
6	INRUSH CURRENT(Typ)	230 V/ 45A COLD START (twidth=1300us measured at 50% Ipeak) COLD START at 230V	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I=36.8A/ 230VAC Twidth = 1020us

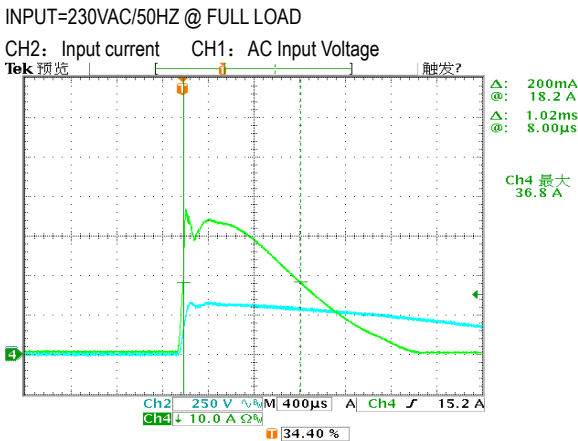




300W Constant Power Mode LED Driver

ELGC-300 series


7	POWER FACTOR	0.97/ 115VAC@ FULL LOAD 0.95/ 230VAC@ FULL LOAD 0.92/ 277VAC@ FULL LOAD	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	PF=0.998@ FULL LOAD /115VAC PF=0.982 @ FULL LOAD /230VAC PF=0.945@ FULL LOAD /277VAC
---	--------------	---	--	--

PF vs LOAD

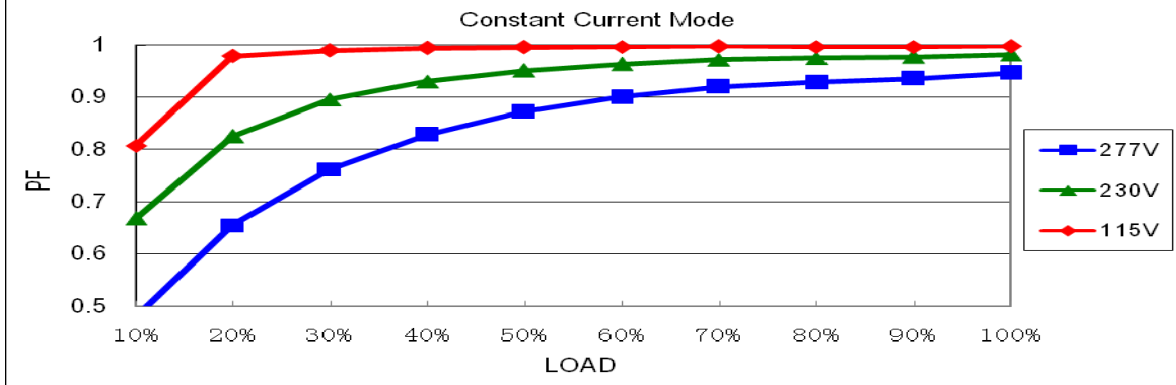


8	TOTAL HARMONIC DISTORTION	THD < 10% (@load ≥ 50%/115VAC; @load ≥ 50%/230VAC; @load ≥ 75%/277VAC)	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: 50% /75% LOAD Ta: 25°C	THD=2.815% @50% load /115VAC THD=5.09% @50% load /230VAC THD=6.94% @75% load /277VAC
---	---------------------------	---	--	--

THD vs LOAD

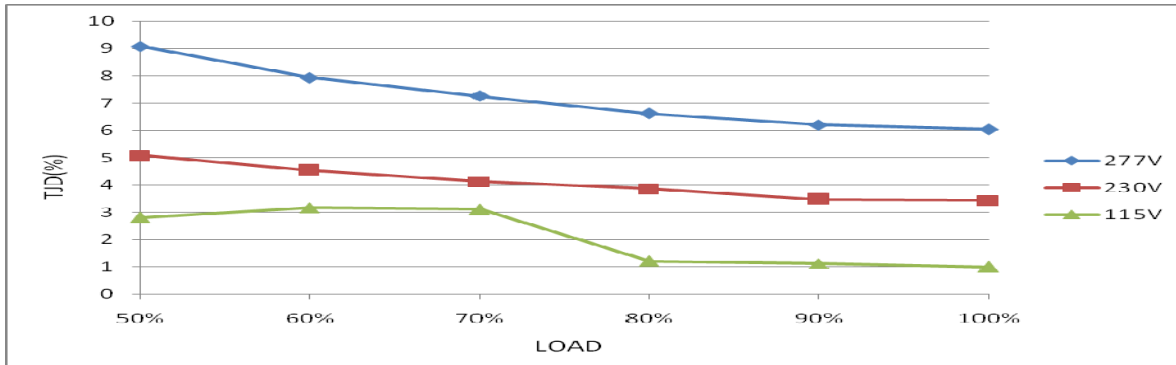

9	EFFICIENCY(Typ)	93.5%	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	95.02%
---	-----------------	-------	---	--------

EFFICIENCY vs LOAD

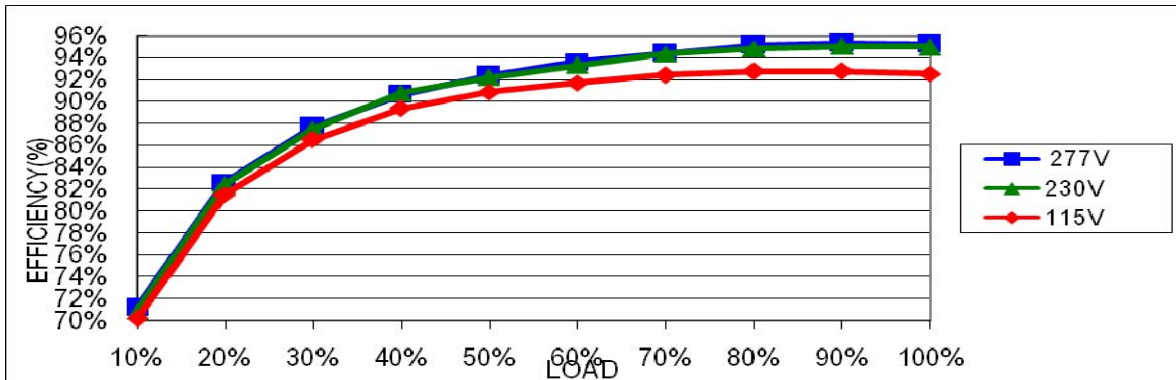



PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER VOLTAGE PROTECTION	121V~145V	I/P: 100VAC I/P: 230VAC I/P: 305VAC O/P: NO LOAD	129.62V/ 100VAC 130.22V/ 230VAC 130.26V/ 305VAC Shut down o/p voltage, re-power on to recovery
2	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 100VAC I/P: 230VAC I/P: 305VAC O/P: FULL LOAD	O.T.P. Active T _{case} >85°C±5°C, derate power automatically by 6%/°C max
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 100VAC I/P: 230VAC I/P: 305VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE constant current limiting ,recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q5 Rated 23.9A/600V	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 436V (2) 436V (3) 446V
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated 22A/600V	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 482V (2) 458V (3) 502V
3	P.F.C DIODE	D1 Rated 10A/600V	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 444V (2) 434V (3) 444V
4	Diode Peak Voltage	Q100 Rated 20A/400V	I/P: High-Line +3V =308V O/P: (1) Full Load (2) Output Short (3) Full Load continue (4) No Load Ta: 25°C	(1) 234V (2) 28.8V (3) 254V (4) 251V
5	Input Capacitor Voltage	C5 Rated: 150 μ / 450 V	I/P: High-Line +3V =308 V O/P: (1) Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change (4) Full load continue Ta: 25°C	(1) 446V (2) 442V (3) 444V (4) 446V



300W Constant Power Mode LED Driver

ELGC-300 series

6	Control IC Voltage Test	U1 Rated 16 V	I/P: High-Line +3V =308V O/P(1)FULL LOAD (2) Output Short (3)O.V.P. (4)NO LOAD VR.LOW LINE Ta: 25°C	(1) 13.5V (2) 13.5V (3) 13.5V (4) 13.5V
---	-------------------------	------------------	--	--

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min I/P-FG: 2 KVAC/min<4.5mA O/P-FG: 1.5KVAC/min	I/P-O/P: 4.125 KVAC/min I/P-FG: 2.4KVAC/min O/P-FG: 1.8 KVAC/min Ta: 25°C	I/P-O/P: 2.317 mA I/P-FG: 2.458mA O/P-FG: 2.528mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG: 500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta: 25°C	I/P-O/P: >9999GΩ I/P-FG: >9999 G Ω O/P-FG: >9999 G Ω NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	20mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230VAC/50HZ O/P: FULL/50% LOAD Ta: 25°C	PASS
2	CONDUCTION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
3	RADIATION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY Air: 8KV Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 2KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
6	SURGE	EN61000-4-5 LIGHT INDUSTRY L-N : 4KV L-PE: 6KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
7	Test by certified Lab & Test Report Prepare. Any contradictions of the test results please refer to the latest EMC test report.			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																				
1	TEMPERATURE RISE TEST	MODEL: ELGC-300-M 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 27.8℃ 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=43.6℃																																																																																						
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 27.8 ℃</th> <th>HIGH AMBIENT Ta=43.6 ℃</th> </tr> </thead> <tbody> <tr><td>1</td><td>RT1</td><td>62.7℃</td><td>77.3℃</td></tr> <tr><td>2</td><td>L1</td><td>63.7℃</td><td>78.3℃</td></tr> <tr><td>3</td><td>BD1</td><td>67.7℃</td><td>82.2℃</td></tr> <tr><td>4</td><td>C5</td><td>63.0℃</td><td>77.8℃</td></tr> <tr><td>5</td><td>Q1</td><td>64.1℃</td><td>79.1℃</td></tr> <tr><td>6</td><td>D1</td><td>66.0℃</td><td>80.8℃</td></tr> <tr><td>7</td><td>Q6</td><td>64.9℃</td><td>79.5℃</td></tr> <tr><td>8</td><td>Q5</td><td>65.7℃</td><td>80.3℃</td></tr> <tr><td>9</td><td>U2</td><td>63.1℃</td><td>77.6℃</td></tr> <tr><td>10</td><td>R8</td><td>63.3℃</td><td>77.7℃</td></tr> <tr><td>11</td><td>C41</td><td>63.4℃</td><td>78.6℃</td></tr> <tr><td>12</td><td>T1</td><td>69.6℃</td><td>85.2℃</td></tr> <tr><td>13</td><td>Q100</td><td>66.9℃</td><td>82.0℃</td></tr> <tr><td>14</td><td>Q101</td><td>66.8℃</td><td>81.3℃</td></tr> <tr><td>15</td><td>U107</td><td>65.0℃</td><td>79.7℃</td></tr> <tr><td>16</td><td>C103</td><td>63.3℃</td><td>77.4℃</td></tr> <tr><td>17</td><td>T500</td><td>65.3℃</td><td>80.4℃</td></tr> <tr><td>18</td><td>C562</td><td>64.4℃</td><td>79.2℃</td></tr> <tr><td>19</td><td>U510</td><td>71.0℃</td><td>87.9℃</td></tr> <tr><td>20</td><td>ZR1</td><td>57.1℃</td><td>71.6℃</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 27.8 ℃	HIGH AMBIENT Ta=43.6 ℃	1	RT1	62.7℃	77.3℃	2	L1	63.7℃	78.3℃	3	BD1	67.7℃	82.2℃	4	C5	63.0℃	77.8℃	5	Q1	64.1℃	79.1℃	6	D1	66.0℃	80.8℃	7	Q6	64.9℃	79.5℃	8	Q5	65.7℃	80.3℃	9	U2	63.1℃	77.6℃	10	R8	63.3℃	77.7℃	11	C41	63.4℃	78.6℃	12	T1	69.6℃	85.2℃	13	Q100	66.9℃	82.0℃	14	Q101	66.8℃	81.3℃	15	U107	65.0℃	79.7℃	16	C103	63.3℃	77.4℃	17	T500	65.3℃	80.4℃	18	C562	64.4℃	79.2℃	19	U510	71.0℃	87.9℃	20	ZR1	57.1℃	71.6℃
NO	Position	ROOM AMBIENT Ta= 27.8 ℃	HIGH AMBIENT Ta=43.6 ℃																																																																																					
1	RT1	62.7℃	77.3℃																																																																																					
2	L1	63.7℃	78.3℃																																																																																					
3	BD1	67.7℃	82.2℃																																																																																					
4	C5	63.0℃	77.8℃																																																																																					
5	Q1	64.1℃	79.1℃																																																																																					
6	D1	66.0℃	80.8℃																																																																																					
7	Q6	64.9℃	79.5℃																																																																																					
8	Q5	65.7℃	80.3℃																																																																																					
9	U2	63.1℃	77.6℃																																																																																					
10	R8	63.3℃	77.7℃																																																																																					
11	C41	63.4℃	78.6℃																																																																																					
12	T1	69.6℃	85.2℃																																																																																					
13	Q100	66.9℃	82.0℃																																																																																					
14	Q101	66.8℃	81.3℃																																																																																					
15	U107	65.0℃	79.7℃																																																																																					
16	C103	63.3℃	77.4℃																																																																																					
17	T500	65.3℃	80.4℃																																																																																					
18	C562	64.4℃	79.2℃																																																																																					
19	U510	71.0℃	87.9℃																																																																																					
20	ZR1	57.1℃	71.6℃																																																																																					
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 305VAC/100VAC O/P: FULL LOAD/85% LOAD Ta= -45℃/-35℃	TEST: OK																																																																																				
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 ℃ NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta=50 ℃ HUMIDITY= 95% R.H	TEST: OK																																																																																				
4	TEMPERATURE COEFFICIENT	±0.03%/℃ (0~60℃)	I/P: 230 VAC O/P: FULL LOAD	±0.0025%/℃ (0~60℃)																																																																																				
5	STORAGE TEMPERATURE TEST	-40~+80℃	1. Thermal shock Temperature: -45℃~ +85℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5CYCLE 5. Input/Output condition: STATIC																																																																																					



300W Constant Power Mode LED Driver

ELGC-300 series

6	THERMAL SHOCK TEST	-40~+50°C	1. Thermal shock Temperature: -45°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 16CYCLE 5. Input/Output condition: 15cycle:230VAC/ FULL LOAD AC on 3 sec/AC off 1 sec TEST 1cycle:230VAC/ FULL LOAD Burn In Test TEST: OK
7	VIBRATION TEST	10~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 6G (5) Test Time: 180min in each axis (X.Y.Z) (6) Ta: 25°C
8	CAPACITOR LIFE CYCLE	HBGC-300-M: SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Tc= 70 °C LIFE TIME (2) I/P: 230VAC O/P: 75% LOAD Tc= 70 °C LIFE TIME (3) I/P: 230VAC O/P: 50% LOAD Tc= 70 °C LIFE TIME	(1) 89817 HRS (2) 112171 HRS (3) 125820 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 565 K hrs min. Telcordia SR-332 (Bellcore) 166 K hrs min. MIL-HDBK-217F (25°C)	
10	Ongoing Reliability Test	I/P: 230VAC O/P: FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	WUWQ/ZHOUB	WENF	LIUWY