



Test Report: ODLC-45-500

45W Constant Current Mode LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

Environment Test

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONSTANT CURRENT REGION	54V~90V	I/P: 230VAC O/P: LED MODE Ta: 25°C	20V~95V
2	CURRENT RIPPLE	5% max@rated current	I/P: 230VAC O/P: FULL/MIN LOAD Ta: 25°C	3.95%
3	CURRENT TOLERANCE	±7%	I/P: 230VAC O/P: FULL/MIN LOAD Ta: 25°C	±1.0%
4	OPEN CIRCUIT VOLTAGE (max)	115V	I/P: 230VAC O/P: NO LOAD Ta: 25°C	110.11V
5	OVER/UNDERSHOOT TEST	<±5 %	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	<5 %
6	SET UP TIME	500ms/230VAC 1200ms/115VAC	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	312ms/230VAC 412ms/115VAC
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p> 		<p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p> 		
7	AUXILIARY DC OUTPUT (A-Type only)	Nominal 12V (deviation 11.4~12.6) @50mA	I/P: 230 VAC O/P:FULL LOAD	11.98V

8 DIMMING TEST


SPEC:

- Output constant current level can be adjusted by applying one of the two methodologies between DIM+ and DIM-: 0 ~ 10Vdc, or 10V PWM signal.
 - Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- © Applying additive 0 ~ 10VDC


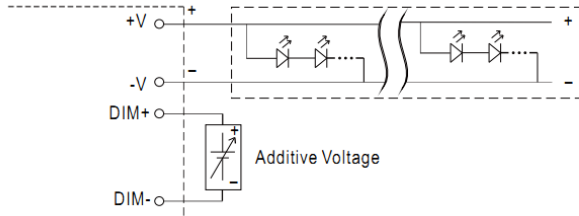


"DO NOT connect "DIM- to Vo-"

- © Applying additive 10V PWM signal (frequency range 300Hz ~ 3KHz):

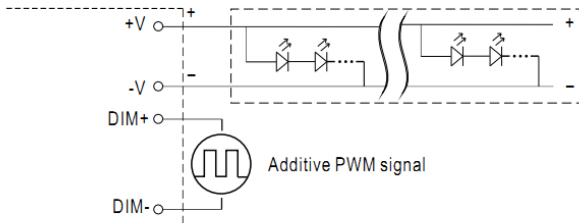

"DO NOT connect "DIM- to Vo-"

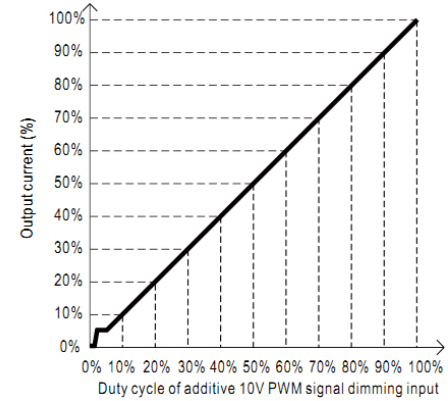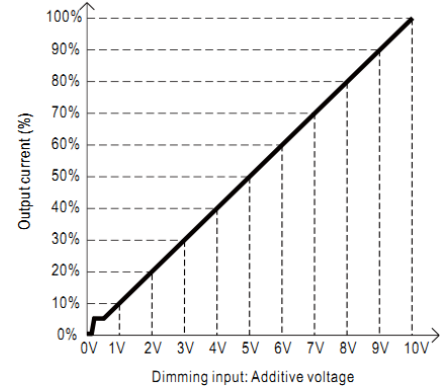

- Note : 1. Min. dimming level is about 8% and the output current is not defined when $0% < I_{out} < 8%$.
 2. The output current could drop down to 0% when dimming input is about 0Vdc or 10V PWM signal with 0% duty cycle.

I/P: 230 VAC

O/P: DIMMING TEST

Ta: 25°C

	v	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V
1	Output Current	0A	0.040	0.099	0.147	0.198	0.248	0.300	0.350	0.398	0.448	0.497
	%	0.00%	7.90%	19.74%	29.48%	39.66%	49.58%	59.90%	70.06%	79.56%	89.58%	99.30%
2	PWM(100Hz)	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
	Output Current	0A	0.043	0.101	0.151	0.200	0.250	0.299	0.348	0.398	0.447	0.491
	%	0.00%	8.58%	20.12%	30.24%	40.06%	50.04%	59.86%	69.66%	79.56%	89.34%	98.12%


TEST RESULT: OK

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~295VAC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	87V~305V
			I/P: (1)LOW-LINE-3V=87 V HIGH-LINE+10V=305 V O/P: FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230VAC ON: 0.5 Sec OFF: 0.5 Sec 20MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 90 VAC ~295 VAC O/P: FULL~MIN LOAD Ta: 25°C	TEST: OK
3	AC CURRENT	0.6A/115VAC 0.4A/230VAC 0.3A/277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	I =0.434A/ 115VAC I =0.219A/ 230VAC I =0.188A/ 277VAC
4	LEAKAGE CURRENT	< 0.75mA / 277VAC	I/P: 277 VAC O/P: NO LOAD Ta: 25°C	L-CASE: 0.0027 mA N-CASE: 0.0027 mA
5	NO LOAD POWER CONSUMPTION	< 0.5W for Blank-Type < 1.2W for A-Type	I/P: 230VAC O/P: NO LOAD Ta: 25°C	0.468W for Blank-Type 0.568W for A-Type
6	INRUSH CURRENT(Typ)	230V/ 30A Twidth =100 us measured at 50% Ipeak COLD START	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I =23.6A/ 230VAC Twidth =76.8us

INPUT=230VAC/50HZ @ FULL LOAD

CH1: AC Input Voltage CH2: Input current

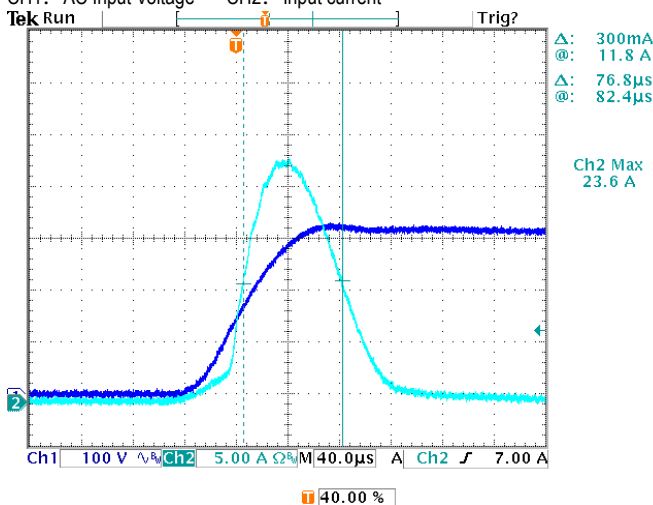

7	EFFICIENCY(Typ)	85%	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	89.87%																												
<p>EFFICIENCY vs LOAD</p> <table border="1"> <caption>Efficiency vs Load Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>277V (%)</th> <th>230V (%)</th> <th>115V (%)</th> </tr> </thead> <tbody> <tr><td>50%</td><td>82.0</td><td>83.5</td><td>85.2</td></tr> <tr><td>60%</td><td>84.5</td><td>85.8</td><td>86.8</td></tr> <tr><td>70%</td><td>86.5</td><td>87.5</td><td>87.8</td></tr> <tr><td>80%</td><td>87.8</td><td>88.5</td><td>88.5</td></tr> <tr><td>90%</td><td>88.8</td><td>89.2</td><td>89.0</td></tr> <tr><td>100%</td><td>89.87</td><td>89.87</td><td>89.87</td></tr> </tbody> </table>					LOAD (%)	277V (%)	230V (%)	115V (%)	50%	82.0	83.5	85.2	60%	84.5	85.8	86.8	70%	86.5	87.5	87.8	80%	87.8	88.5	88.5	90%	88.8	89.2	89.0	100%	89.87	89.87	89.87
LOAD (%)	277V (%)	230V (%)	115V (%)																													
50%	82.0	83.5	85.2																													
60%	84.5	85.8	86.8																													
70%	86.5	87.5	87.8																													
80%	87.8	88.5	88.5																													
90%	88.8	89.2	89.0																													
100%	89.87	89.87	89.87																													
8	POWER FACTOR	0.95/ 115VAC 0.92/ 230VAC 0.90/ 277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	PF=0.996/ 115VAC PF=0.976/ 230VAC PF=0.942/ 277VAC																												
<p>P.F vs LOAD</p> <table border="1"> <caption>P.F vs Load Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>277V</th> <th>230V</th> <th>115V</th> </tr> </thead> <tbody> <tr><td>50%</td><td>0.86</td><td>0.94</td><td>0.99</td></tr> <tr><td>60%</td><td>0.88</td><td>0.95</td><td>0.99</td></tr> <tr><td>70%</td><td>0.91</td><td>0.96</td><td>0.99</td></tr> <tr><td>80%</td><td>0.92</td><td>0.97</td><td>0.99</td></tr> <tr><td>90%</td><td>0.93</td><td>0.98</td><td>0.99</td></tr> <tr><td>100%</td><td>0.94</td><td>0.99</td><td>0.99</td></tr> </tbody> </table>					LOAD (%)	277V	230V	115V	50%	0.86	0.94	0.99	60%	0.88	0.95	0.99	70%	0.91	0.96	0.99	80%	0.92	0.97	0.99	90%	0.93	0.98	0.99	100%	0.94	0.99	0.99
LOAD (%)	277V	230V	115V																													
50%	0.86	0.94	0.99																													
60%	0.88	0.95	0.99																													
70%	0.91	0.96	0.99																													
80%	0.92	0.97	0.99																													
90%	0.93	0.98	0.99																													
100%	0.94	0.99	0.99																													
9	TOTAL HARMONIC DISTORTION	THD<20% (@load≥60%/115VAC, 230VAC; @load≥75%/277VAC)	I/P: 115 VAC/60% LOAD I/P: 230 VAC/60% LOAD I/P: 277 VAC/75% LOAD Ta: 25°C	THD=6.89% @60% load /115VAC THD=9.80% @60% load /230VAC THD=11.85% @75% load /277VAC																												
<p>THD vs LOAD</p> <table border="1"> <caption>THD vs Load Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>277V (%)</th> <th>230V (%)</th> <th>115V (%)</th> </tr> </thead> <tbody> <tr><td>50%</td><td>11.5</td><td>9.5</td><td>6.8</td></tr> <tr><td>60%</td><td>11.5</td><td>9.8</td><td>6.9</td></tr> <tr><td>70%</td><td>11.8</td><td>10.2</td><td>6.9</td></tr> <tr><td>80%</td><td>12.0</td><td>10.8</td><td>7.0</td></tr> <tr><td>90%</td><td>12.2</td><td>11.2</td><td>7.1</td></tr> <tr><td>100%</td><td>12.5</td><td>11.85</td><td>7.1</td></tr> </tbody> </table>					LOAD (%)	277V (%)	230V (%)	115V (%)	50%	11.5	9.5	6.8	60%	11.5	9.8	6.9	70%	11.8	10.2	6.9	80%	12.0	10.8	7.0	90%	12.2	11.2	7.1	100%	12.5	11.85	7.1
LOAD (%)	277V (%)	230V (%)	115V (%)																													
50%	11.5	9.5	6.8																													
60%	11.5	9.8	6.9																													
70%	11.8	10.2	6.9																													
80%	12.0	10.8	7.0																													
90%	12.2	11.2	7.1																													
100%	12.5	11.85	7.1																													

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	SHORT CIRCUIT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 90VAC I/P: 295VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup mode, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q 1 Rated 800V/9A	I/P: High-Line +3V =298V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 608V (2) 524V (3) 542V
2	O/P Diode (MOSFET)	D101 Rated 1000V/5A	I/P: High-Line +3V =298V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 808V (2) 796V (3) 804V
3	Control IC	U1 Rated 35V (MAX)	I/P: High-Line +3V =298V O/P: (1) FULL LOAD (2) Output Short (3) Low Line No Load Ta: 25°C	(1) 17.9V (2) 17.9V (3) 17.9V
4	Clamp Diode	D 1 Rated 1000V/1A	I/P: High-Line +3V = 298V O/P: (1) Full Load input on/off (2) Output Short Ta: 25°C	(1) 490V (2) 458V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min	I/P-O/P: 4.2 KVAC/min Ta: 25°C	I/P-O/P: 2.487mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ	I/P-O/P: 500 VDC Ta: 25°C/70% RH	I/P-O/P: >9999MΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230 VAC/50HZ O/P: FULL/60% LOAD Ta: 25°C	PASS
2	CONDUCTION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR: 8KV Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
6	SURGE	EN61000-4-5 LIGHT INDUSTRY L-N: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

■ **RELIABILITY TEST**

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																												
1	TEMPERATURE RISE TEST	MODEL: ODL-45-700 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 32.5℃ 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 53.7℃																																																														
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 32.5 ℃</th> <th>HIGH AMBIENT Ta=53.7 ℃</th> </tr> </thead> <tbody> <tr><td>1</td><td>L1</td><td>69.7℃</td><td>91.0℃</td></tr> <tr><td>2</td><td>BD1</td><td>66.5℃</td><td>87.2℃</td></tr> <tr><td>3</td><td>D1</td><td>68.5℃</td><td>90.2℃</td></tr> <tr><td>4</td><td>Q1</td><td>72.1℃</td><td>93.8℃</td></tr> <tr><td>5</td><td>U1</td><td>66.2℃</td><td>87.1℃</td></tr> <tr><td>6</td><td>T1</td><td>71.1℃</td><td>92.3℃</td></tr> <tr><td>7</td><td>C16</td><td>65.5℃</td><td>86.7℃</td></tr> <tr><td>8</td><td>D101</td><td>73.3℃</td><td>94.1℃</td></tr> <tr><td>9</td><td>C201</td><td>63.5℃</td><td>84.5℃</td></tr> <tr><td>10</td><td>Q100</td><td>62.4℃</td><td>83.6℃</td></tr> <tr><td>11</td><td>L100</td><td>61.1℃</td><td>82.7℃</td></tr> <tr><td>12</td><td>C106</td><td>59.9℃</td><td>80.9℃</td></tr> <tr><td>13</td><td>C110</td><td>59.4℃</td><td>80.6℃</td></tr> <tr><td>14</td><td>Tc</td><td>60.9℃</td><td>80.3℃</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 32.5 ℃	HIGH AMBIENT Ta=53.7 ℃	1	L1	69.7℃	91.0℃	2	BD1	66.5℃	87.2℃	3	D1	68.5℃	90.2℃	4	Q1	72.1℃	93.8℃	5	U1	66.2℃	87.1℃	6	T1	71.1℃	92.3℃	7	C16	65.5℃	86.7℃	8	D101	73.3℃	94.1℃	9	C201	63.5℃	84.5℃	10	Q100	62.4℃	83.6℃	11	L100	61.1℃	82.7℃	12	C106	59.9℃	80.9℃	13	C110	59.4℃	80.6℃	14	Tc	60.9℃	80.3℃
NO	Position	ROOM AMBIENT Ta= 32.5 ℃	HIGH AMBIENT Ta=53.7 ℃																																																													
1	L1	69.7℃	91.0℃																																																													
2	BD1	66.5℃	87.2℃																																																													
3	D1	68.5℃	90.2℃																																																													
4	Q1	72.1℃	93.8℃																																																													
5	U1	66.2℃	87.1℃																																																													
6	T1	71.1℃	92.3℃																																																													
7	C16	65.5℃	86.7℃																																																													
8	D101	73.3℃	94.1℃																																																													
9	C201	63.5℃	84.5℃																																																													
10	Q100	62.4℃	83.6℃																																																													
11	L100	61.1℃	82.7℃																																																													
12	C106	59.9℃	80.9℃																																																													
13	C110	59.4℃	80.6℃																																																													
14	Tc	60.9℃	80.3℃																																																													
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 295VAC/90VAC O/P: FULL/80% LOAD Ta= -25℃	TEST: OK																																																												
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 ℃ NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta=50 ℃ HUMIDITY= 95 %R.H	TEST: OK																																																												
4	TEMPERATURE COEFFICIENT	±0.03 %/℃(0~40℃)	I/P: 230 VAC O/P: FULL LOAD	±0.001%/℃																																																												
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature: -45℃~ +85℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition: AC OFF STATIC		TEST: OK																																																												



6	THERMAL SHOCK TEST	1. Thermal shock Temperature: Tcase=-25°C~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 16 CYCLE 5. Input/Output condition: 230VAC/Full Load AC ON/OFF TEST AC on 3 sec/AC off 1 sec TEST	TEST: OK
7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 2G (5) Test Time: 60min in each axis (X.Y.Z) (6) Ta: 25°C	TEST: OK
8	CAPACITOR LIFE CYCLE	ODL-45-700: SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta= 50 °C LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 50 °C LIFE TIME (4) I/P: 230VAC O/P: MIN LOAD Ta= 50 °C LIFE TIME	(1) 555640 HRS (2) 84189 HRS (3) 99615 HRS (4) 107091 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 408.8K hrs min. MIL-HDBK-217F (25°C)	
10	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure(Expected Life) : 30,000 hours @ Tcase 85°C ; 50,000 hours @ Tcase 75°C	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	ZHANGZJ/ZHUOKB	SKY	LIUWY