



# Test Report: UHP-500-36

---

500W Slim Type with PFC Switching Supply

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

## ■ RELIABILITY TEST

Environment Test

## DESIGN VERIFY TEST

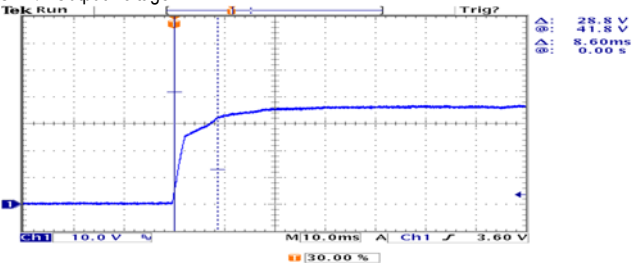
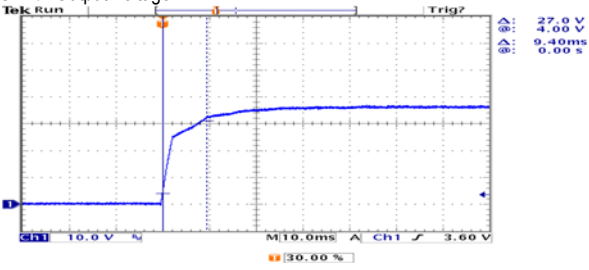
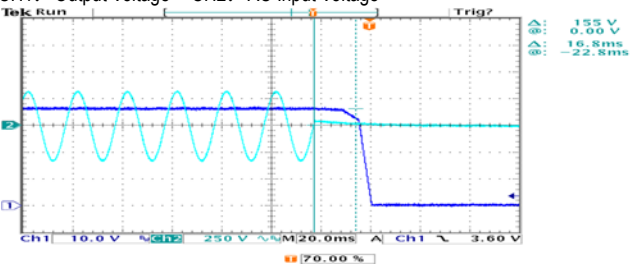
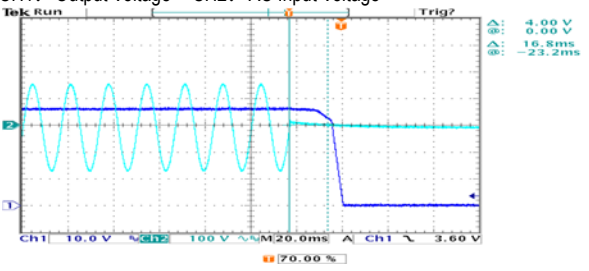
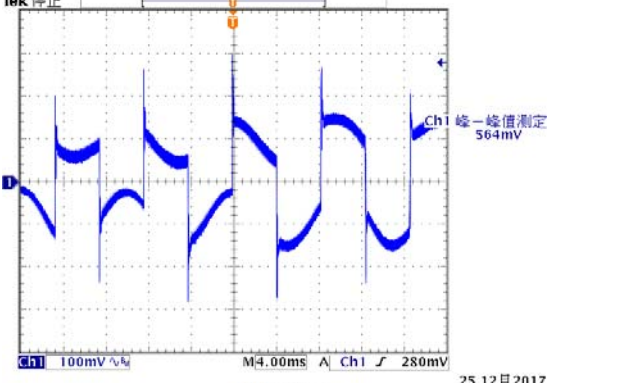
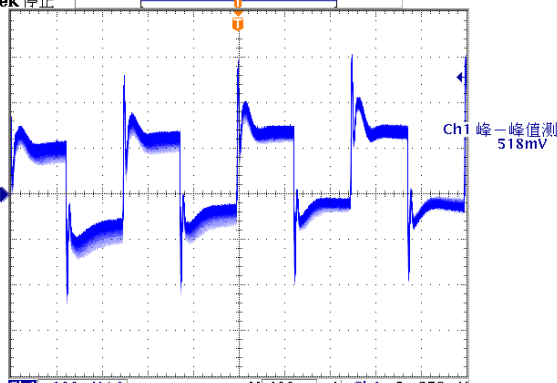
### OUTPUT FUNCTION TEST

| NO   | TEST ITEM                   | SPECIFICATION  | TEST CONDITION   | RESULT                         |
|--|-----------------------------|--|--|--------------------------------|
| 1  | OUTPUT VOLTAGE ADJUST RANGE | 34.2V~37.8V  | I/P: 230VAC<br>O/P: NO LOAD<br>Ta: 25°C                    | 33.37V~38.67V                  |
| 2  | PEAK LOAD                   | 150% peak load capability(100ms)   | I/P: 230VAC<br>O/P: 150% LOAD<br>Ta: 25°C                  | TEST: OK                       |
| 3  | OUTPUT VOLTAGE TOLERANCE    | -1%~+1%  | I/P: 90VAC / 264VAC<br>O/P: FULL / NO LOAD<br>Ta: 25°C     | - 0.28%~+0.36%                 |
| 4  | LINE REGULATION             | -0.3%~+0.3%  | I/P: 110VAC ~ 264VAC<br>O/P: FULL LOAD<br>Ta: 25°C         | - 0.03 %~+0.05%                |
| 5  | LOAD REGULATION             | -0.5%~+0.5%  | I/P: 230VAC<br>O/P: FULL ~NO LOAD<br>Ta: 25°C              | - 0.06%~+0.03%                 |
| 6  | OVER/UNDERSHOOT TEST        | <±5 %  | I/P: 230VAC<br>O/P: FULL LOAD<br>Ta: 25°C                  | <5%                            |
| 7  | RIPPLE & NOISE (Max)        | 360mVp-p   | I/P: 230VAC<br>O/P: FULL LOAD<br>Ta: 25°C                  | 208mVp-p                       |
| <p>high frequency :</p>  |                             | <p>low frequency :</p>   |  |                                |
| 8  | SET UP TIME(Max)            | 230VAC/ 1000ms<br>115VAC/1000ms  | I/P: 230 VAC<br>I/P: 115 VAC<br>O/P: FULL LOAD<br>Ta: 25°C | 230VAC/612 ms<br>115VAC/440 ms |
| <p>INPUT=230VAC/50HZ @ FULL LOAD<br/>CH1: Output Voltage CH2: AC Input Voltage</p> |                             | <p>INPUT=115VAC/60HZ @ FULL LOAD<br/>CH1: Output Voltage CH2: AC Input Voltage</p> |  |                                |



500W Slim Type with PFC Switching Supply

UHP-500 series


|   |                   |   |  |                                 |
|---|-------------------|---|--|---------------------------------|
| 9   | RISE TIME (Max)   | 230VAC/ 50ms<br>115VAC/ 50ms  | I/P: 230 VAC<br>I/P: 115 VAC<br>O/P: FULL LOAD<br>Ta: 25°C   | 230VAC/8.6ms<br>115VAC/9.4 ms   |
| <p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1: Output Voltage</p>    |                   | <p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1: Output Voltage</p>   |  |                                 |
| 10  | HOLD UP TIME(Typ) | 230VAC/ 12ms<br>115VAC/ 12ms  | I/P: 230 VAC<br>I/P: 115 VAC<br>O/P: FULL LOAD<br>Ta: 25°C   | 230VAC/16.8ms<br>115VAC/16.8 ms |
| <p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p>                    |                   | <p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p>                   |  |                                 |
| 11  | DYNAMIC LOAD      | V1: 3600 mVp-p  | I/P: 230VAC<br>O/P:<br>(1)FULL/50% LOAD 50%DUTY / 120HZ<br>(2)FULL/50% LOAD 50%DUTY / 1KHZ<br>Ta: 25°C | (1) 564mVp-p<br>(2) 518mVp-p    |
| <p>FULL /50% LOAD 50%DUTY / 120HZ</p> <p>Tek 停止</p>  <p>CH1 峰-峰值测定 564mV</p> <p>25 12月 2017 15:02:49</p> |                   | <p>FULL /50% LOAD 50%DUTY / 1KHZ</p> <p>Tek 停止</p>  <p>CH1 峰-峰值测定 518mV</p> <p>25 12月 2017 15:02:04</p> |  |                                 |

## INPUT FUNCTION TEST

| NO | TEST ITEM              | SPECIFICATION                           | TEST CONDITION   | RESULT                                |
|----|------------------------|---|--|---------------------------------------|
| 1  | INPUT VOLTAGE RANGE    | 90VAC~264VAC                            | I/P: TESTING<br>O/P: FULL LOAD<br>Ta: 25°C   | 87 V~300V                             |
|    |                        |   | I/P:<br>(1)LOW-LINE-3V=87 V<br>HIGH-LINE+15%=300 V<br>O/P: FULL/NO LOAD<br>ON: 30 Sec OFF: 30 Sec 10MIN<br>(2)230VAC<br>ON: 0.5 Sec OFF: 0.5 Sec 20MIN<br>( POWER ON/OFF NO DAMAGE ) | TEST: OK                              |
| 2  | Withstand 300VAC Surge | 300VAC input for 5 seconds<br>No damage | I/P: 300VAC<br>O/P: FULL LOAD<br>Ta: 25°C  | TEST: OK                              |
| 3  | INPUT FREQUENCY RANGE  | 47HZ ~63 HZ<br>NO DAMAGE                | I/P: 90 VAC ~264 VAC<br>O/P: FULL~NO LOAD<br>Ta: 25°C  | TEST: OK                              |
| 4  | AC CURRENT             | 4.85A/115VAC<br>2.6A/230VAC             | I/P: 115 VAC<br>I/P: 230 VAC<br>O/P: FULL LOAD<br>Ta: 25°C   | I = 4.64A/ 115VAC<br>I =2.33A/ 230VAC |
| 5  | LEAKAGE CURRENT        | < 0.75mA / 240VAC                       | I/P: 240 VAC<br>O/P: NO LOAD<br>Ta: 25°C   | L-FG: 0.316 mA<br>N-FG: 0.370mA       |
| 6  | INRUSH CURRENT(Typ)    | 230V/60A<br>115V/30A<br>COLD START      | I/P: 230VAC/115VAC<br>O/P: FULL LOAD<br>Ta: 25°C   | I =50.4A/ 230VAC<br>I =12.3A/ 115VAC  |


INPUT=230VAC/50HZ @ FULL LOAD

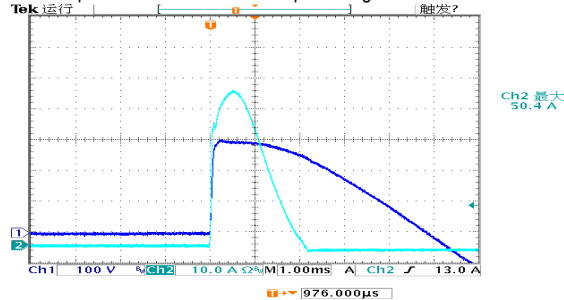CH2: Input current CH1: AC Input Voltage




INPUT=115VAC/60HZ @ FULL LOAD

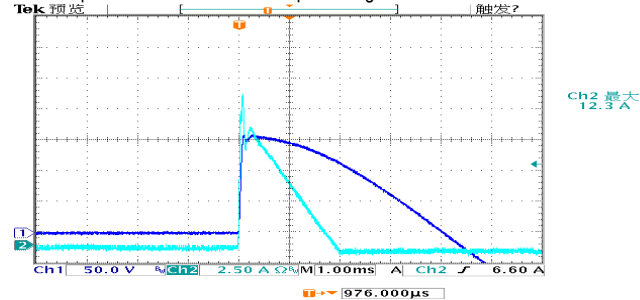CH2: Input current CH1: AC Input Voltage




|   |                 |     |   |         |
|---|-----------------|-----|---|---------|
| 7 | EFFICIENCY(Typ) | 95% | I/P: 230VAC<br>O/P: FULL LOAD<br>Ta: 25°C | 95.52 % |
|---|-----------------|-----|---|---------|

**EFFICIENCY vs LOAD**

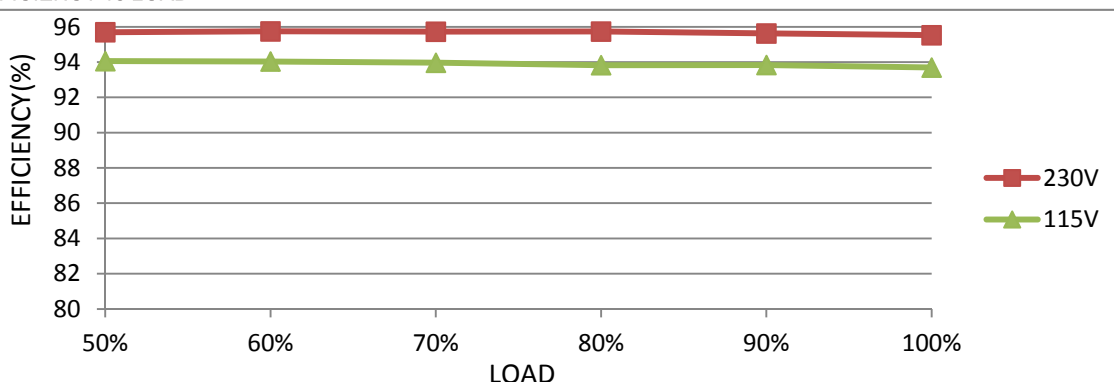

|   |              |                             |  |                                      |
|---|--------------|-----------------------------|--|--------------------------------------|
| 8 | POWER FACTOR | 0.95/ 230VAC<br>0.98/115VAC | I/P: 230 VAC<br>I/P: 115 VAC<br>O/P: FULL LOAD<br>Ta: 25°C | PF=0.974/ 230VAC<br>PF=0.989/ 115VAC |
|---|--------------|-----------------------------|--|--------------------------------------|

**P.F vs LOAD**

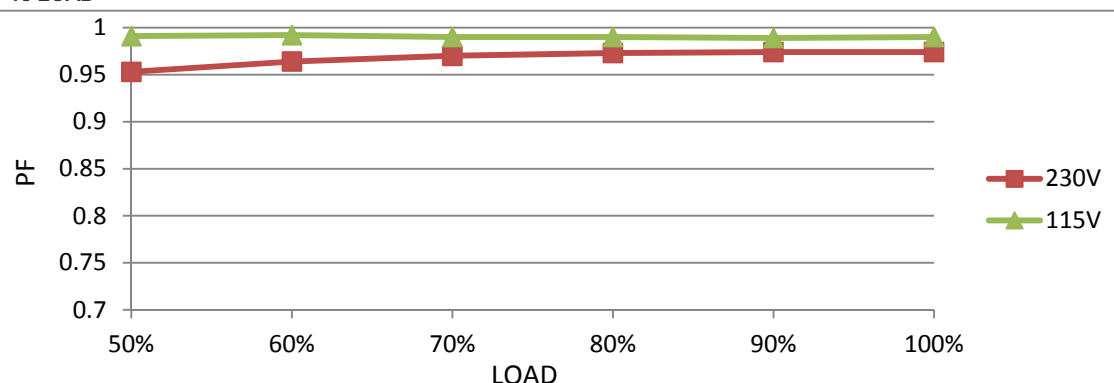

## PROTECTION FUNCTION TEST

| NO | TEST ITEM                   | SPECIFICATION                             | TEST CONDITION  | RESULT   |
|----|-----------------------------|---|---|--|
| 1  | OVER LOAD PROTECTION        | 110~140%                                  | I/P: 110VAC<br>I/P: 230VAC<br>I/P: 264VAC<br>O/P: TESTING<br>Ta: 25°C | 125.9%/ 110VAC<br>125.6%/ 230VAC<br>125.6%/ 264VAC<br>Hiccup mode, recovers automatically after fault condition is removed |
| 2  | OVER VOLTAGE PROTECTION     | 39.6V~46.8V                               | I/P: 90VAC<br>I/P: 230VAC<br>I/P: 264VAC<br>O/P: NO LOAD<br>Ta: 25°C  | 45.42 V/ 90VAC<br>45.57V/ 230VAC<br>45.42V/ 264VAC<br>Shut down o/p voltage, re-power on to recovery                       |
| 3  | OVER TEMPERATURE PROTECTION | NO DAMAGE                                 | I/P: 110VAC<br>I/P: 230VAC<br>I/P: 264VAC<br>O/P: FULL LOAD           | O.T.P. Active<br>Shut down o/p voltage, recovers automatically after temperature goes down                                 |
| 4  | SHORT PROTECTION            | SHORT EVERY OUTPUT<br>1 HOUR<br>NO DAMAGE | I/P: 90VAC<br>I/P: 264VAC<br>O/P: FULL LOAD<br>Ta: 25°C               | NO DAMAGE<br>Hiccup mode, recovers automatically after fault condition is removed  |



## CONTROL FUNCTION TEST

| NO | TEST ITEM             | SPECIFICATION   | TEST CONDITION                         | RESULT   |
|----|-----------------------|---|--|----------|
| 1  | REDUNDANT CONTROL     | For parallel connection protection:For parallel applications,when one PSU can not work,the another one will be automatically enabled.This can preven the system crash,and provide the reliability of system | I/P: 230 VAC<br>O/P:FULL LOAD          | TEST: OK |
| 2  | DC OK CONTACT RATINGS | 30VDC/1A<br>RESISTIVE LOAD  | I/P:230VAC<br>O/P:FULL LOAD<br>Ta:25°C | TEST: OK |

## COMPONENT STRESS TEST

| NO | TEST ITEM            | SPECIFICATION                 | TEST CONDITION   | RESULT   |
|----|----------------------|-------------------------------|--|--|
| 1  | PWM Power Transistor | Q10 Rated<br>22A/600V         | I/P: High-Line +3V =267V<br>O/P: (1) FULL LOAD Turn on<br>(2) Output Short<br>(3) FULL LOAD continue<br>Ta: 25°C                           | (1) 525 V<br>(2) 541V<br>(3) 530 V                                 |
| 2  | O/P Diode (MOSFET)   | Q100 Rated<br>42A/100 V       | I/P: High-Line +3V =267V<br>O/P: (1) FULL LOAD Turn on<br>(2) Output Short<br>(3) FULL LOAD continue<br>Ta: 25°C                           | (1) 86.6 V<br>(2) 11.0 V<br>(3) 83.5 V                             |
| 3  | Input Capacitor      | C5 Rated<br>270 $\mu$ / 420 V | I/P: High-Line +3V =267 V<br>O/P: (1) FULL LOAD input on/off<br>(2) NO LOAD input on /Off<br>(3) FULL LOAD /NO LOAD<br>Change<br>Ta: 25°C  | (1) 418 V<br>(2) 412 V<br>(3) 414 V                                |
| 4  | Control IC           | U1 Rated<br>20V (MAX.)        | I/P: High-Line +3V =267 V<br>O/P: ((1) FULL LOAD<br>(2) Output Short<br>(3) O.L.P<br>(4) O.V.P<br>(5) Low Line No Load Vo(min)<br>Ta: 25°C | (1) 19.0 V<br>(2) 17.4 V<br>(3) 18.2 V<br>(4) 15.2 V<br>(5) 14.8 V |
| 5  | PFC Power Transistor | Q1 Rated<br>22A/600V          | I/P: High-Line +3V =267V<br>O/P: (1) FULL LOAD Turn on<br>(2) Output Short<br>(3) FULL LOAD continue<br>Ta: 25°C                           | (1) 462 V<br>(2) 466 V<br>(3) 465 V                                |

**SAFETY TEST**

| NO | TEST ITEM            | SPECIFICATION   | TEST CONDITION  | RESULT   |
|----|----------------------|---|---|--|
| 1  | WITHSTAND VOLTAGE    | I/P-O/P: 3.75 KVAC/min<br>I/P-FG: 2.0 KVAC/min<br>O/P-FG: 1.25 KVAC/min | I/P-O/P: 4.125 KVAC/min<br>I/P-FG: 2.4 KVAC/min<br>O/P-FG: 1.5 KVAC/min<br>Ta: 25°C | I/P-O/P: 3.477 mA<br>I/P-FG: 3.424 mA<br>O/P-FG: 3.474 mA<br>NO DAMAGE |
| 2  | ISOLATION RESISTANCE | I/P-O/P: 500VDC>100MΩ<br>I/P-FG: 500VDC>100MΩ<br>O/P-FG: 500VDC>100MΩ   | I/P-O/P: 500 VDC<br>I/P-FG: 500 VDC<br>O/P-FG: 500 VDC<br>Ta: 25°C/70%RH            | I/P-O/P: 3568 MΩ<br>I/P-FG: >9999 MΩ<br>O/P-FG: 5083 MΩ                |
| 3  | GROUNDING CONTINUITY | FG(PE) TO CHASSIS<br>OR TRACE < 100 mΩ                                  | 40A / 2min<br>Ta: 25°C  | 10mΩ   |

**E.M.C TEST**

| NO | TEST ITEM                                   | SPECIFICATION   | TEST CONDITION                                    | RESULT                        |
|----|---|---|---|-------------------------------|
| 1  | HARMONIC                                    | EN61000-3-2   | I/P: 230VAC/50HZ<br>O/P: FULL LOAD<br>Ta: 25°C    | PASS                          |
| 2  | CONDUCTION                                  | EN55032   | I/P: 230 VAC (50HZ)<br>O/P: FULL LOAD<br>Ta: 25°C | PASS<br>Test by certified Lab |
| 3  | RADIATION                                   | EN55032   | I/P: 230 VAC (50HZ)<br>O/P: FULL LOAD<br>Ta: 25°C | PASS<br>Test by certified Lab |
| 4  | E.S.D                                       | EN61000-4-2<br>HEAVY INDUSTRY<br>AIR: 8KV<br>Contact: 4KV | I/P: 230 VAC/50HZ<br>O/P: FULL LOAD<br>Ta: 25°C   | PASS<br>CRITERIA A            |
| 5  | E.F.T                                       | EN61000-4-4<br>HEAVY INDUSTRY<br>INPUT: 2KV               | I/P: 230VAC/50HZ<br>O/P: FULL LOAD<br>Ta: 25°C    | PASS<br>CRITERIA A            |
| 6  | SURGE                                       | EN61000-4-5<br>HEAVY INDUSTRY<br>L-N: 2KV<br>L,N-PE: 4KV  | I/P: 230VAC/50HZ<br>O/P: FULL LOAD<br>Ta: 25°C    | PASS<br>CRITERIA A            |
| 7  | Test by certified Lab & Test Report Prepare |   |   |                               |

## RELIABILITY TEST

### ENVIRONMENT TEST

| NO | TEST ITEM   | SPECIFICATION   | TEST CONDITION   | RESULT   |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
|----|---|---|--|--|----|----------|-------------------------|-------------------------|---|-----|--------|--------|---|----|--------|--------|---|----|--------|--------|---|----|--------|--------|---|----|--------|--------|---|-----|--------|--------|---|-----|--------|--------|---|-----|--------|--------|---|-----|--------|--------|----|----|--------|--------|----|----|--------|--------|----|----|--------|--------|----|------|--------|--------|----|------|--------|--------|----|------|--------|--------|----|------|--------|--------|----|------|--------|--------|----|------|--------|--------|----|------|--------|--------|----|----|--------|--------|
| 1  | TEMPERATURE RISE TEST   | MODEL: UHP-500-48<br>1. ROOM AMBIENT BURN-IN: 2 HRS<br>I/P: 230VAC O/P: FULL LOAD Ta=28.6°C<br>2. HIGH AMBIENT BURN-IN: 2 HRS<br>I/P: 230VAC O/P: FULL LOAD Ta=44.5°C   |  |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
|    |   |   |  | <table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=28.6 °C</th> <th>HIGH AMBIENT Ta=44.5 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>BD1</td><td>58.3°C</td><td>71.1°C</td></tr> <tr><td>2</td><td>D9</td><td>62.9°C</td><td>75.9°C</td></tr> <tr><td>3</td><td>Q2</td><td>56.6°C</td><td>70.2°C</td></tr> <tr><td>4</td><td>D5</td><td>60.5°C</td><td>73.5°C</td></tr> <tr><td>5</td><td>C5</td><td>51.6°C</td><td>64.4°C</td></tr> <tr><td>6</td><td>Q10</td><td>69.9°C</td><td>84.2°C</td></tr> <tr><td>7</td><td>Q11</td><td>68.0°C</td><td>82.2°C</td></tr> <tr><td>8</td><td>C93</td><td>63.5°C</td><td>77.3°C</td></tr> <tr><td>9</td><td>C36</td><td>58.9°C</td><td>72.6°C</td></tr> <tr><td>10</td><td>U1</td><td>50.0°C</td><td>62.8°C</td></tr> <tr><td>11</td><td>U2</td><td>51.4°C</td><td>64.5°C</td></tr> <tr><td>12</td><td>T1</td><td>70.7°C</td><td>84.9°C</td></tr> <tr><td>13</td><td>Q103</td><td>60.3°C</td><td>75.3°C</td></tr> <tr><td>14</td><td>Q100</td><td>54.5°C</td><td>69.2°C</td></tr> <tr><td>15</td><td>Q210</td><td>48.2°C</td><td>61.7°C</td></tr> <tr><td>16</td><td>U100</td><td>49.3°C</td><td>63.2°C</td></tr> <tr><td>17</td><td>C115</td><td>48.7°C</td><td>62.8°C</td></tr> <tr><td>18</td><td>C119</td><td>49.8°C</td><td>64.3°C</td></tr> <tr><td>19</td><td>TSW1</td><td>65.2°C</td><td>78.7°C</td></tr> <tr><td>20</td><td>Tc</td><td>56.4°C</td><td>70.5°C</td></tr> </tbody> </table> | NO | Position | ROOM AMBIENT Ta=28.6 °C | HIGH AMBIENT Ta=44.5 °C | 1 | BD1 | 58.3°C | 71.1°C | 2 | D9 | 62.9°C | 75.9°C | 3 | Q2 | 56.6°C | 70.2°C | 4 | D5 | 60.5°C | 73.5°C | 5 | C5 | 51.6°C | 64.4°C | 6 | Q10 | 69.9°C | 84.2°C | 7 | Q11 | 68.0°C | 82.2°C | 8 | C93 | 63.5°C | 77.3°C | 9 | C36 | 58.9°C | 72.6°C | 10 | U1 | 50.0°C | 62.8°C | 11 | U2 | 51.4°C | 64.5°C | 12 | T1 | 70.7°C | 84.9°C | 13 | Q103 | 60.3°C | 75.3°C | 14 | Q100 | 54.5°C | 69.2°C | 15 | Q210 | 48.2°C | 61.7°C | 16 | U100 | 49.3°C | 63.2°C | 17 | C115 | 48.7°C | 62.8°C | 18 | C119 | 49.8°C | 64.3°C | 19 | TSW1 | 65.2°C | 78.7°C | 20 | Tc | 56.4°C | 70.5°C |
| NO | Position  | ROOM AMBIENT Ta=28.6 °C   | HIGH AMBIENT Ta=44.5 °C                                      |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 1  | BD1   | 58.3°C  | 71.1°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 2  | D9  | 62.9°C  | 75.9°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 3  | Q2  | 56.6°C  | 70.2°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 4  | D5  | 60.5°C  | 73.5°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 5  | C5  | 51.6°C  | 64.4°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 6  | Q10   | 69.9°C  | 84.2°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 7  | Q11   | 68.0°C  | 82.2°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 8  | C93   | 63.5°C  | 77.3°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 9  | C36   | 58.9°C  | 72.6°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 10 | U1  | 50.0°C  | 62.8°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 11 | U2  | 51.4°C  | 64.5°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 12 | T1  | 70.7°C  | 84.9°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 13 | Q103  | 60.3°C  | 75.3°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 14 | Q100  | 54.5°C  | 69.2°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 15 | Q210  | 48.2°C  | 61.7°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 16 | U100  | 49.3°C  | 63.2°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 17 | C115  | 48.7°C  | 62.8°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 18 | C119  | 49.8°C  | 64.3°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 19 | TSW1  | 65.2°C  | 78.7°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 20 | Tc  | 56.4°C  | 70.5°C   |  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 2  | LOW TEMPERATURE<br>TURN ON TEST                                   | TURN ON AFTER 2 HOUR  | I/P: 264VAC/90VAC<br>O/P: FULL /80% LOAD<br>Ta= -25°C        | TEST: OK   |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 3  | HIGH HUMIDITY<br>HIGH TEMPERATURE<br>HIGH VOLTAGE<br>TURN ON TEST | AFTER 12 HOURS<br>IN CHAMBER ON<br>CONTROL 50°C<br>NO DAMAGE  | I/P: 264VAC<br>O/P: FULL LOAD<br>Ta=50°C<br>HUMIDITY= 95%R.H | TEST: OK   |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 4  | TEMPERATURE<br>COEFFICIENT  | ±0.03 %/°C (0~50°C)   | I/P: 230 VAC<br>O/P: FULL LOAD                               | ±0.001%/°C (0~50°C)  |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |
| 5  | STORAGE TEMPERATURE TEST  | 1. Thermal shock Temperature: -45°C ~ +90°C<br>2. Temperature change rate : 25°C / MIN<br>3. Dwell time low and high temperature : 30 MIN/EACH<br>4. Total test cycle: 100 CYCLE<br>5. Input/Output condition: STATIC |  | TEST: OK   |    |          |                         |                         |   |     |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |    |        |        |   |     |        |        |   |     |        |        |   |     |        |        |   |     |        |        |    |    |        |        |    |    |        |        |    |    |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |      |        |        |    |    |        |        |





500W Slim Type with PFC Switching Supply

# UHP-500 series

|    |                             |   |  |
|----|-----------------------------|---|--|
| 6  | THERMAL SHOCK TEST          | 1. Thermal shock Temperature: -25°C~ +55°C<br>2. Temperature change rate : 25°C / MIN<br>3. Dwell time low and high temperature : 30 MIN/EACH<br>4. Total test cycle: 16 CYCLE<br>5. Input/Output condition: 230VAC/FULL LOAD AC ON/OFF TEST<br>AC on 3 sec/AC off 1 sec TEST | TEST: OK   |
| 7  | VIBRATION TEST              | 1 Carton & 1 Set<br>(1) Waveform: Sine Wave<br>(2) Frequency: 10~500Hz<br>(3) Sweep Time: 10min/sweep cycle<br>(4) Acceleration: 5G<br>(5) Test Time: 180min in each axes (X.Y.Z)<br>(6) Ta: 25°C   | TEST: OK   |
| 8  | CAPACITOR LIFE CYCLE        | UHP-500-48: SUPPOSE C105 IS THE MOST CRITICAL COMPONENT<br>(1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME<br>(2) I/P: 230VAC O/P: FULL LOAD Ta= 50 °C LIFE TIME<br>(3) I/P: 230VAC O/P: 75% LOAD Ta= 50 °C LIFE TIME<br>(4) I/P: 230VAC O/P: 50% LOAD Ta= 50 °C LIFE TIME | (1) 822639 HRS<br>(2) 160235 HRS<br>(3) 234623 HRS<br>(4) 322006 HRS |
| 9  | MTBF                        | Conducted by Parts Stress Analysis Prediction<br>168K hrs min. MIL-HDBK-217F (25°C)   |  |
| 10 | DMTBF/Accelerated Life Test | Demonstration Mean Time Between Failure(Expected Life) :<br>30,000 hours @ Ta 50°C  |  |

| TEST RESULT | TESTER        | REVIEW | APPROVAL |
|-------------|---------------|--------|----------|
| PASS        | SHENJW/ZHUOKB | SKY    | LIUWY    |