



# Test Report: RSP-1600-12

---

1600W Power Supply with Single Output

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test


## ■ RELIABILITY TEST

ENVIRONMENT TEST

■ DESIGN VERIFY TEST

**OUTPUT FUNCTION TEST**


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 11.5 V~ 15V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	11.03V~15.26V/230VAC 11.03V~15.26V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: 1%~-1%	I/P: 180VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: 0.25%~-0.25%
3	LINE REGULATION (Max)	V1: 0.5%~-0.5%	I/P: 180VAC~264VAC O/P:FULL LOAD Ta:25°C	V1: 0%~0%
4	LOAD REGULATION(Max)	V1: 0.5%~-0.5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0.25%~-0.25%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	<5%
6	RIPPLE & NOISE(Max)	V1: 150 mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 119 mVp-p
		<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>high frequency :</p> </div> <div style="text-align: center;"> <p>low frequency :</p> </div> </div>		
7	SET UP TIME(Max)	230VAC/1500ms	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 1100 ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage				

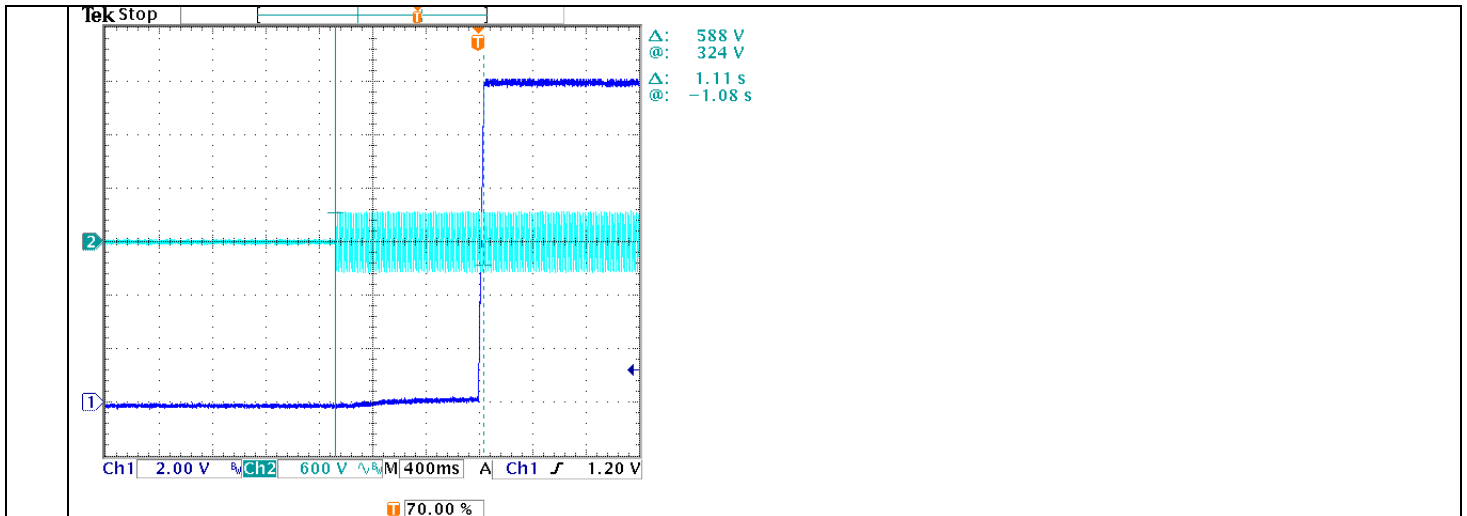

8	RISE TIME (Max)	230VAC/60ms	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 34.6 ms
---	-----------------	-------------	---	-----------------

INPUT=230VAC/50HZ @ FULL LOAD


CH1 : Output Voltage

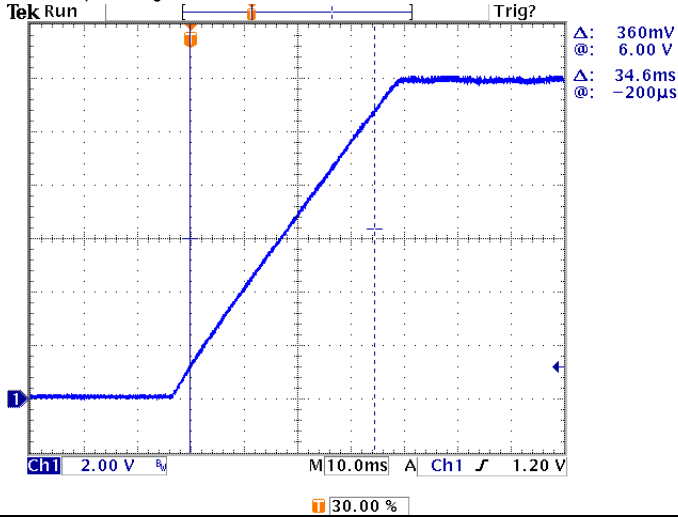

9	HOLD UP TIME (Typ.)	230VAC 75%/ 16ms 230VAC 100%/10ms	I/P : 230 VAC O/P : 75% LOAD O/P : 100% LOAD Ta : 25°C	20ms (75% load) 12.8ms (100% load)
---	---------------------	--------------------------------------	---	---------------------------------------

INPUT=230VAC/50HZ @ 75% LOAD


CH1 : Output Voltage CH2 : AC Input Voltage

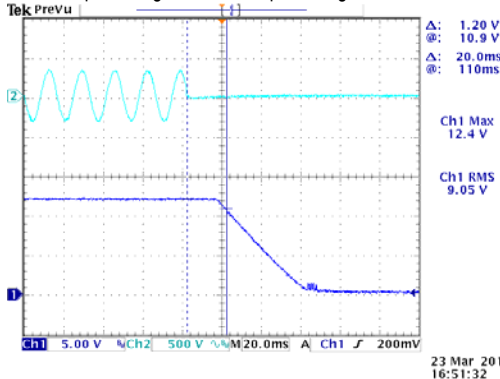

23 Mar 2016 16:51:32

INPUT=230VAC/50HZ @ FULL LOAD


CH1 : Output Voltage CH2 : AC Input Voltage

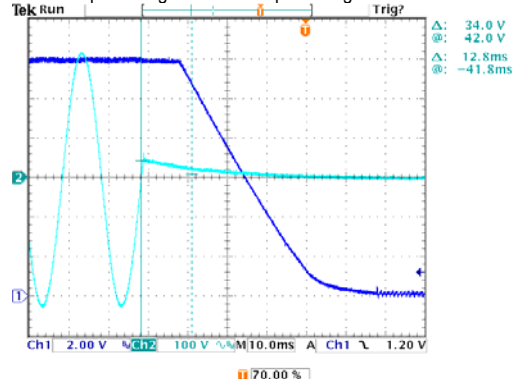

10	DYNAMIC LOAD	V1: 1200 mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	756mVp-p 772mVp-p


## INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~264VAC	I/P:TESTING O/P: FULL LOAD O/P:60% LOAD Ta:25°C	150 V~ 264 V 87V~264V
			I/P: (1)LOW-LINE-3V=87 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (2)230Vac ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230Vac ON:3Sec OFF:3Sec 12HOURS (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:90 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 8 A 115V/ 14 A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD (PLEASE CHECK DERATING CURVE) Ta : 25°C	I =7.49A/ 230VAC I =12.41A/ 115VAC
4	LEAKAGE CURRENT	<2 mA / 230 VAC	I/P : 230 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.56 mA N-FG : 0.56 mA
5	POWER FACTOR (Typ.)	0.97 / 230VAC	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	PF=0.977/230VAC
	P.F vs LOAD			

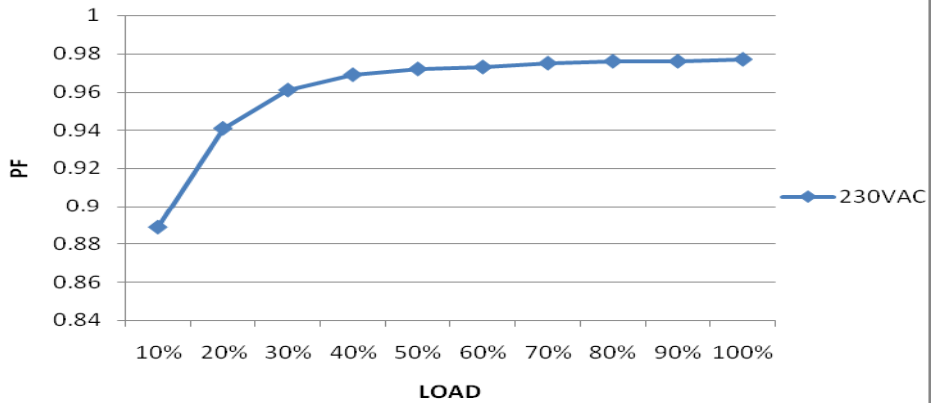

6	EFFICIENCY(Typ.)	89%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	89.69 %
---	------------------	-----	---	---------


EFFICIENCY vs LOAD

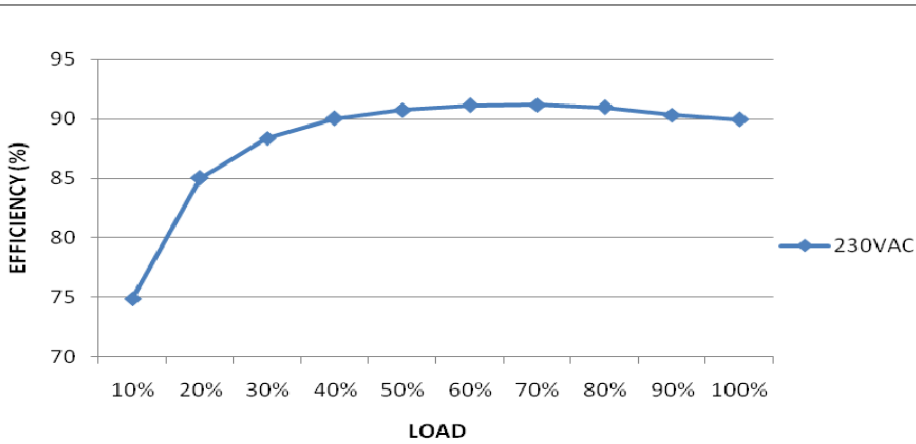

7	INRUSH CURRENT(Typ.)	230V/35 A COLD START	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	I =31.6A/ 230VAC T50= 1920 us/230V
---	----------------------	-------------------------	---	---------------------------------------

INPUT=230VAC/50HZ @ FULL LOAD


CH1 : Input current



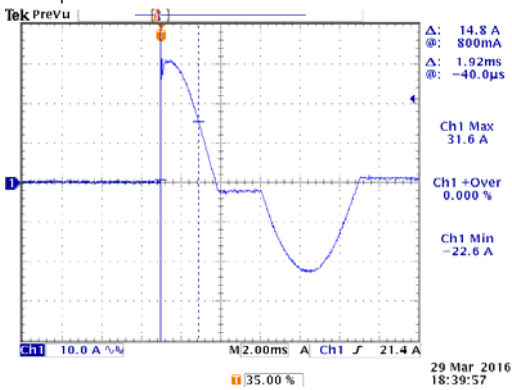


## PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105%~115% PROTECTION TYPE : Constant current limiting, unit will shut down o/p voltage after 5 sec. re-power on to recover	I/P: 264VAC I/P: 230VAC I/P: 180VAC O/P: TESTING Ta:25°C	109.2%/ 264VAC 109.2%/ 230VAC 109.2%/180VAC PROTECTION TYPE : Constant current limiting, unit will shut down o/p voltage after 5 sec. re-power on to recover
2	OVER VOLTAGE PROTECTION	15.75 V~ 18.75 V PROTECTION TYPE : Shut down o/p voltage, re-power on to recover	I/P: 264VAC I/P: 230VAC I/P: 90VAC O/P: MIN LOAD Ta:25°C	17.5V/ 264VAC 17.5V/ 230VAC 17.5V/ 90VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	NO DAMAGE PROTECTION TYPE : Shut down o/p voltage, recovers automatically after temperature goes down	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD	O.T.P. Active PROTECTION TYPE : Shut down o/p voltage, recovers automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE PROTECTION TYPE : Constant current limiting, unit will shut down o/p voltage after 5 sec. re-power on to recover	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Constant current limiting, unit will shut down o/p voltage after 5 sec. re-power on to recover

## CONTROL FUNCTION TEST

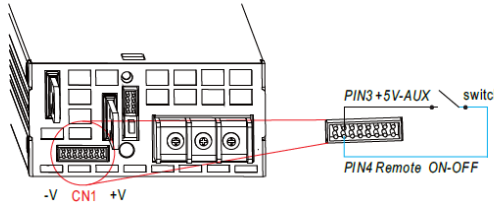NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT											
1	AUXILIARY POWER (AUX)	1. 5V±10%@0.3A ripple:150mVp-p 2. 12V±10%@0.8A ripple:250mVp-p	I/P: 230 VAC O/P: FULL LOAD Ta:25°C	4.74 V 0.3 A ; ripple: 24mVp-p 11.28V 0.8 A ; ripple: 195 mVp-p											
2	REMOTE ON/OFF CONTROL	<p>※ The power supply can be turned ON/OFF individually or along with other units by using the "Remote ON-OFF" function.</p>  <p>I/P: 230 VAC O/P: FULL LOAD Ta:25°C Test Result :</p> <table border="1" data-bbox="470 1803 1077 1904"> <thead> <tr> <th>Between Remote ON-OFF and +5V-AUX</th> <th>Power Supply Status</th> </tr> </thead> <tbody> <tr> <td>SW SHORT</td> <td>ON</td> </tr> <tr> <td>SW OPEN</td> <td>OFF</td> </tr> </tbody> </table>	Between Remote ON-OFF and +5V-AUX	Power Supply Status	SW SHORT	ON	SW OPEN	OFF	<p>PIN3 +5V-AUX → switch</p> <p>PIN4 Remote ON-OFF</p> <table border="1" data-bbox="1045 1534 1500 1624"> <thead> <tr> <th>Between Remote ON-OFF and +5V-AUX</th> <th>Power Supply Status</th> </tr> </thead> <tbody> <tr> <td>Switch Short</td> <td>ON</td> </tr> <tr> <td>Switch Open</td> <td>OFF</td> </tr> </tbody> </table>	Between Remote ON-OFF and +5V-AUX	Power Supply Status	Switch Short	ON	Switch Open	OFF
Between Remote ON-OFF and +5V-AUX	Power Supply Status														
SW SHORT	ON														
SW OPEN	OFF														
Between Remote ON-OFF and +5V-AUX	Power Supply Status														
Switch Short	ON														
Switch Open	OFF														
3	REMOTE SENSE	S+ / S- >0.5V Compensate voltage drop on the load wiring up to 0.5V.	I/P: 230 VAC O/P: FULL LOAD Ta:25°C	> 0.5 V											
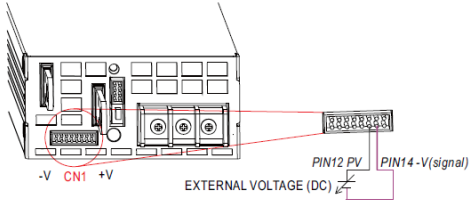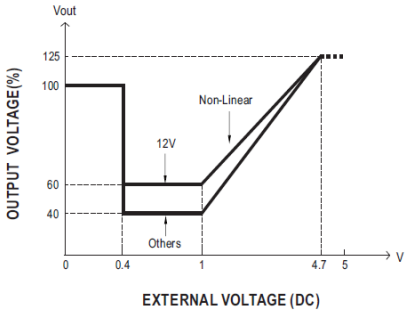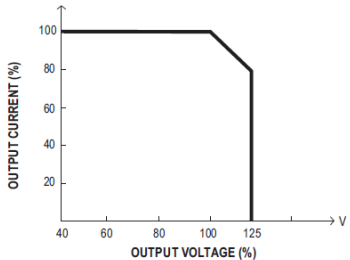
<p>4</p>	<p>ALARM SIGNAL</p>	<p>1. DC OK SIGNAL          High (4.5 ~ 5.5V) : When the <math>V_{out} \leq 80\% \pm 5\%</math>.          Low (-0.1 ~ 0.5V) : When <math>V_{out} \geq 80\% \pm 5\%</math>.          The maximum sourcing current is 10mA and only for output.          I/P: 230 VAC          O/P: FULL LOAD          Ta: 25°C          Test Result :</p> <table border="1" data-bbox="523 510 1098 611"> <thead> <tr> <th>Vout</th> <th>DC OK SIGNAL</th> </tr> </thead> <tbody> <tr> <td><math>V_{out} \leq 75\%</math></td> <td>5V</td> </tr> <tr> <td><math>V_{out} \geq 85\%</math></td> <td>-0.09V</td> </tr> </tbody> </table> <p>2. T-ALARM</p> <table border="1" data-bbox="523 678 1098 757"> <thead> <tr> <th>P.S.U STATUS</th> <th>Vo</th> <th>T-ALARM</th> </tr> </thead> <tbody> <tr> <td>NORMAL</td> <td><math>100\% \pm 2\%</math></td> <td>-0.1 ~ -0.5V</td> </tr> <tr> <td>OTP OR FAN LOCK</td> <td>0V</td> <td>4.5~5.5V</td> </tr> </tbody> </table> <p>I/P: 230 VAC          O/P: FULL LOAD          Ta: 25°C          Test Result :</p> <table border="1" data-bbox="523 887 1098 987"> <thead> <tr> <th>P.SU STATUS</th> <th>T-ALARM</th> </tr> </thead> <tbody> <tr> <td>NORMAL</td> <td>-0.09V</td> </tr> <tr> <td>OTP OR FAN LOCK</td> <td>4.937V</td> </tr> </tbody> </table>	Vout	DC OK SIGNAL	$V_{out} \leq 75\%$	5V	$V_{out} \geq 85\%$	-0.09V	P.S.U STATUS	Vo	T-ALARM	NORMAL	$100\% \pm 2\%$	-0.1 ~ -0.5V	OTP OR FAN LOCK	0V	4.5~5.5V	P.SU STATUS	T-ALARM	NORMAL	-0.09V	OTP OR FAN LOCK	4.937V
Vout	DC OK SIGNAL																						
$V_{out} \leq 75\%$	5V																						
$V_{out} \geq 85\%$	-0.09V																						
P.S.U STATUS	Vo	T-ALARM																					
NORMAL	$100\% \pm 2\%$	-0.1 ~ -0.5V																					
OTP OR FAN LOCK	0V	4.5~5.5V																					
P.SU STATUS	T-ALARM																						
NORMAL	-0.09V																						
OTP OR FAN LOCK	4.937V																						
<p>5</p>	<p>OUTPUT VOLTAGE PROGRAMMABLE(PV)</p>	<p>※ In addition to the adjustment via the built-in potentiometer, the output voltage can be trimmed by applying EXTERNAL VOLTAGE.</p>  <p>◎ For Remote Sense / Local Sense, please refer to "Voltage Drop Compensation" section.</p>   <p>◎ The rated current should change with the Output Voltage Programming accordingly.          ◎ For Remote Sense / Local Sense, please refer to "Voltage Drop Compensation" section.</p> <p>I/P: 230 VAC          O/P: FULL LOAD          Ta: 25°C          Test Result :</p> <table border="1" data-bbox="472 1798 1345 2000"> <thead> <tr> <th>MODEL \ PV</th> <th>&lt;0.4V</th> <th>1V</th> <th>4.7V</th> <th>5V</th> </tr> </thead> <tbody> <tr> <td>SPEC</td> <td><math>12V \pm 5\%</math></td> <td><math>7.2V \pm 5\%</math></td> <td><math>15V \pm 5\%</math></td> <td><math>15V \pm 5\%</math></td> </tr> <tr> <td>Vout</td> <td>12V</td> <td>7.27V</td> <td>15.01V</td> <td>15.19V</td> </tr> </tbody> </table>	MODEL \ PV	<0.4V	1V	4.7V	5V	SPEC	$12V \pm 5\%$	$7.2V \pm 5\%$	$15V \pm 5\%$	$15V \pm 5\%$	Vout	12V	7.27V	15.01V	15.19V						
MODEL \ PV	<0.4V	1V	4.7V	5V																			
SPEC	$12V \pm 5\%$	$7.2V \pm 5\%$	$15V \pm 5\%$	$15V \pm 5\%$																			
Vout	12V	7.27V	15.01V	15.19V																			

<p><b>6</b> OUTPUT CURRENT PROGRAMMABLE (PC)</p>	<p>© For Remote Sense / Local Sense, please refer to "Voltage Drop Compensation" section.</p> <p>I/P: 230 VAC O/P: TESTING Ta: 25°C Test Result :</p> <table border="1" data-bbox="470 784 1212 884"> <thead> <tr> <th>ADJ V</th> <th>&lt;0.4V</th> <th>1V</th> <th>4.7V</th> <th>5V</th> </tr> </thead> <tbody> <tr> <td>SPEC</td> <td>110%±10%</td> <td>20%±10%</td> <td>100%±10%</td> <td>100%±10%</td> </tr> <tr> <td>Iout</td> <td>108.2%</td> <td>18.08%</td> <td>100.6%</td> <td>101.6%</td> </tr> </tbody> </table>			ADJ V	<0.4V	1V	4.7V	5V	SPEC	110%±10%	20%±10%	100%±10%	100%±10%	Iout	108.2%	18.08%	100.6%	101.6%
ADJ V	<0.4V	1V	4.7V	5V														
SPEC	110%±10%	20%±10%	100%±10%	100%±10%														
Iout	108.2%	18.08%	100.6%	101.6%														
<p><b>7</b> CURRENT SHARING</p>	<p>&lt; ±5%</p>	<p>I/P : 230 VAC O/P : FULL/50% LOAD Ta : 25°C</p>	<p>O/P : 100%</p> <p>PSU1 : 126.8 A PSU2 : 125.5 A PSU3 : 124.3 A PSU4 : 126.3 A PSU5 : 125.3 A PSU6 : 125.3 A</p> <p>O/P : 50%</p> <p>PSU1 : 62.3 A PSU2 : 63.4 A PSU3 : 63.1 A PSU4 : 62.1 A PSU5 : 63.5 A PSU6 : 63.5 A</p>															

## COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) <b>Peak Voltage</b>	Q901 Rated 29A/600 V	I/P: High-Line +3V = 267V AC ON/OFF VDS: O/P: (1) Full Load (2) Output Short (3) Dynamic Load Full Load/ Min. Load 90% Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90% Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90% Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50% Duty/120Hz (7) 0% → 400% Load. Ta: 25°C	VDS: (1) 494V (2) 470V (3) 478V (4) 482V (5) 486V (6) 475V (7) 482V



2	P.F.C Transistor ( D to S) or (C to E) <b>Peak Voltage</b>	Q52 Rated 52 A/600 V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25°C	VDS: (1)439V (2)455V (3)455V (4)451V (5)459V (6)435V (7)419V		
3	Diode <b>Peak Voltage</b>	Q101 Rated 210 A/75 V  Q104 Rated 210 A/75 V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD Ta:25°C	Q101: VDS: (1)50.6V (2)51.4V (3)59.8V (4)52.2V (5)51.8V (6)61V (7)58.6V (8)60.9V	Q104: VDS: (1)60.1V (2)54.5V (3)65.7V (4)53.7V (5)52.1V (6)66.5V (7)51.3V (8)64.1V	
4	Input Capacitor Voltage	C5 Rated: 680μ/400V SURGE VOLTAGE:450V	I/P:High-Line +3V =267 V O/P: (1)Full Load Ta:25°C	(1)395V		
5	Control IC Voltage Test	PWM IC U901 Rated 6.5 V~24 V  PFC IC U51 Rated 4.5V~15V  O/P IC U142 Rated 4.5V~15V	I/P:High-Line +3V =267 V AC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. Ta:25°C	U901 (1) 13.4 V (2) 13.25 V (3) 13.25 V (4) 13.2 V	U51 12.93V 12.93V 12.9 V 12.9V	U142 12.5 V 12.5 V 12.5 V 12.5 V

**SAFETY TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P-FG : 2KVAC/min O/P-FG:1.5KVAC/min	I/P-O/P: 3.6 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.8 KVAC/min Ta:25°C	I/P-O/P:6.23mA I/P-FG:5.77mA O/P-FG:6.08m A NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 7.28GΩ I/P-FG: 5.7GΩ O/P-FG: 9.2GΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	17mΩ

**E.M.C TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:100% LOAD Ta:25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS A	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR : 8KV / Contact : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

**RELIABILITY TEST**

**ENVIRONMENT TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																								
1	TEMPERATURE RISE TEST	MODEL : RSP-1600-24 1. ROOM AMBIENT BURN-IN : 1 HRS I/P : 230VAC O/P : FULL LOAD Ta= 28.3 °C 2. HIGH AMBIENT BURN-IN : 3 HRS I/P : 230VAC O/P : FULL LOAD Ta= 52.5 °C																																																																																																										
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 28.3 °C</th> <th>HIGH AMBIENT Ta= 52.5 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>Q901</td><td>63.0°C</td><td>93.0°C</td></tr> <tr><td>2</td><td>Q904</td><td>60.8°C</td><td>89.5°C</td></tr> <tr><td>3</td><td>Q52</td><td>63.1°C</td><td>89.3°C</td></tr> <tr><td>4</td><td>D50</td><td>70.3°C</td><td>97.8°C</td></tr> <tr><td>5</td><td>BD1</td><td>44.2°C</td><td>69.2°C</td></tr> <tr><td>6</td><td>L900</td><td>54.9°C</td><td>80.5°C</td></tr> <tr><td>7</td><td>T3</td><td>53.4°C</td><td>80.3°C</td></tr> <tr><td>8</td><td>RG301</td><td>71.8°C</td><td>98.9°C</td></tr> <tr><td>9</td><td>RG302</td><td>66.6°C</td><td>92.5°C</td></tr> <tr><td>10</td><td>T1</td><td>60.5°C</td><td>88.0°C</td></tr> <tr><td>11</td><td>Q101</td><td>63.9°C</td><td>94.7°C</td></tr> <tr><td>12</td><td>Q104</td><td>61.3°C</td><td>90.9°C</td></tr> <tr><td>13</td><td>U921</td><td>43.7°C</td><td>68.2°C</td></tr> <tr><td>14</td><td>C5</td><td>38.5°C</td><td>62.4°C</td></tr> <tr><td>15</td><td>L100</td><td>71.9°C</td><td>96.4°C</td></tr> <tr><td>16</td><td>ZNR1</td><td>29.2°C</td><td>53.3°C</td></tr> <tr><td>17</td><td>L2</td><td>47.4°C</td><td>71.9°C</td></tr> <tr><td>18</td><td>RY1</td><td>33.3°C</td><td>58.0°C</td></tr> <tr><td>19</td><td>C101</td><td>31.3°C</td><td>55.1°C</td></tr> <tr><td>20</td><td>T52</td><td>41.7°C</td><td>66.6°C</td></tr> <tr><td>21</td><td>RTH21</td><td>55.7°C</td><td>82.7°C</td></tr> <tr><td>22</td><td>RTH9</td><td>44.4°C</td><td>68.5°C</td></tr> <tr><td>23</td><td>U671</td><td>31.3°C</td><td>55.2°C</td></tr> <tr><td>24</td><td>U82</td><td>59.7°C</td><td>86.3°C</td></tr> <tr><td>25</td><td>Q151</td><td>40.9°C</td><td>65.0°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 28.3 °C	HIGH AMBIENT Ta= 52.5 °C	1	Q901	63.0°C	93.0°C	2	Q904	60.8°C	89.5°C	3	Q52	63.1°C	89.3°C	4	D50	70.3°C	97.8°C	5	BD1	44.2°C	69.2°C	6	L900	54.9°C	80.5°C	7	T3	53.4°C	80.3°C	8	RG301	71.8°C	98.9°C	9	RG302	66.6°C	92.5°C	10	T1	60.5°C	88.0°C	11	Q101	63.9°C	94.7°C	12	Q104	61.3°C	90.9°C	13	U921	43.7°C	68.2°C	14	C5	38.5°C	62.4°C	15	L100	71.9°C	96.4°C	16	ZNR1	29.2°C	53.3°C	17	L2	47.4°C	71.9°C	18	RY1	33.3°C	58.0°C	19	C101	31.3°C	55.1°C	20	T52	41.7°C	66.6°C	21	RTH21	55.7°C	82.7°C	22	RTH9	44.4°C	68.5°C	23	U671	31.3°C	55.2°C	24	U82	59.7°C	86.3°C	25	Q151	40.9°C	65.0°C
NO	Position	ROOM AMBIENT Ta= 28.3 °C	HIGH AMBIENT Ta= 52.5 °C																																																																																																									
1	Q901	63.0°C	93.0°C																																																																																																									
2	Q904	60.8°C	89.5°C																																																																																																									
3	Q52	63.1°C	89.3°C																																																																																																									
4	D50	70.3°C	97.8°C																																																																																																									
5	BD1	44.2°C	69.2°C																																																																																																									
6	L900	54.9°C	80.5°C																																																																																																									
7	T3	53.4°C	80.3°C																																																																																																									
8	RG301	71.8°C	98.9°C																																																																																																									
9	RG302	66.6°C	92.5°C																																																																																																									
10	T1	60.5°C	88.0°C																																																																																																									
11	Q101	63.9°C	94.7°C																																																																																																									
12	Q104	61.3°C	90.9°C																																																																																																									
13	U921	43.7°C	68.2°C																																																																																																									
14	C5	38.5°C	62.4°C																																																																																																									
15	L100	71.9°C	96.4°C																																																																																																									
16	ZNR1	29.2°C	53.3°C																																																																																																									
17	L2	47.4°C	71.9°C																																																																																																									
18	RY1	33.3°C	58.0°C																																																																																																									
19	C101	31.3°C	55.1°C																																																																																																									
20	T52	41.7°C	66.6°C																																																																																																									
21	RTH21	55.7°C	82.7°C																																																																																																									
22	RTH9	44.4°C	68.5°C																																																																																																									
23	U671	31.3°C	55.2°C																																																																																																									
24	U82	59.7°C	86.3°C																																																																																																									
25	Q151	40.9°C	65.0°C																																																																																																									
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR ( MIN )	I/P : 230 VAC O/P : 105% LOAD Ta : 25°C	TEST : OK																																																																																																								
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 230VAC/180VAC O/P : 100 % LOAD Ta= -35°C/-30°C	TEST : OK																																																																																																								
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK																																																																																																								
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0-50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.002 %/°C (0-50°C)																																																																																																								



6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC	OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -35°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition :  15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST(13500 TIMES)  1cycle:230V/ FULL LOAD Burn In Test	OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 2G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C101 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50°C LIFE TIME	(1) 2451612HRS (2) 445544HRS (3) 480914HRS (4) 490935HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 160.9K hrs min. Telcordia SR-332 (Bellcore) ; 42.1K hrs min. MIL-HDBK-217F (25°C)	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 50,000 hours @ TA 50°C	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT TSENG

12.10.30 A50-F031