



# Test Report: IDPC-25-350

---

25W Constant Current Mode LED Driver

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

## ■ RELIABILITY TEST

Environment Test

## DESIGN VERIFY TEST

### OUTPUT FUNCTION TEST



NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONSTANT CURRENT REGION	49V~70V	I/P: 230VAC O/P: LED MODE Ta: 25°C	14V~70V
2	CURRENT RIPPLE	5% max@rated current	I/P: 230VAC O/P: FULL/MIN LOAD Ta: 25°C	2.5%
3	CURRENT TOLERANCE	±7%	I/P: 230VAC O/P: FULL/MIN LOAD Ta: 25°C	4.2%
4	OPEN CIRCUIT VOLTAGE (max)	100V	I/P: 230VAC O/P: NO LOAD Ta: 25°C	73.47V
5	OVER/UNDERSHOOT TEST	<±5 %	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	±1.173%
6	SET UP TIME	500ms/230VAC 1200ms/115VAC	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	404ms/230VAC 336ms/115VAC
<div style="display: flex; justify-content: space-around;"> <div style="width: 45%;"> <p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p> <p>Δ: 275 V @: 0.00 V Δ: 404ms @: -386ms</p> <p>Ch1 14.0 V Ch2 250 V 100ms A Ch1 56.0 V</p> </div> <div style="width: 45%;"> <p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p> <p>Δ: 120 V @: 0.00 V Δ: 336ms @: -320ms</p> <p>Ch1 14.0 V Ch2 250 V 100ms A Ch1 56.0 V</p> </div> </div>				
7	AUXILIARY DC OUTPUT (For A-Type only)	Nominal 12V (deviation 11.4~12.6) @50mA	I/P: 230 VAC O/P: FULL LOAD	11.990 V

8 DIMMING TEST



SPEC:

- Output constant current level can be adjusted by applying one of the two methodologies between DIM+ and DIM-: 0 ~ 10Vdc, or 10V PWM signal.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.

© Applying additive 0 ~ 10VDC

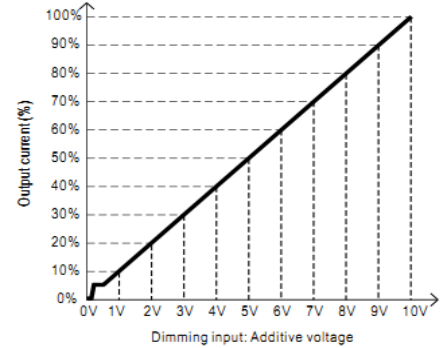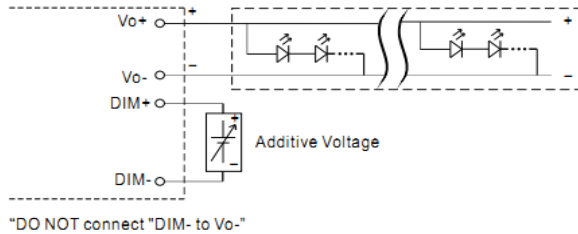

© Applying additive 10V PWM signal (frequency range 300Hz ~ 3KHz):

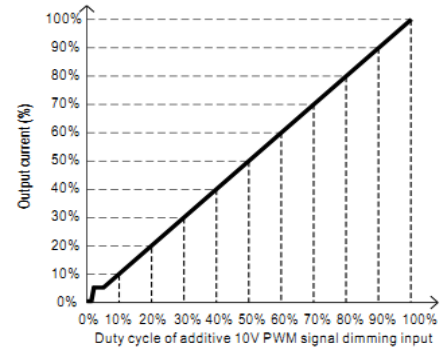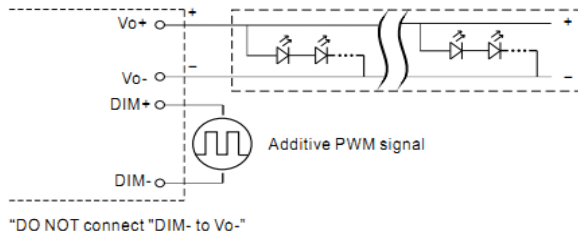

Note : 1. Min. dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.  
 2. The output current could drop down to 0% when dimming input is about 0Vdc or 10V PWM signal with 0% duty cycle.

I/P: 230 VAC


O/P: DIMMING TEST


Ta: 25°C

1	Dimming voltage	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V
	Output Current	0A	0.035A	0.069A	0.103A	0.140A	0.175A	0.212A	0.248A	0.283A	0.318A	0.353A
	Percentage of rated current	0.00%	10.00%	19.71%	29.43%	40.00%	50.00%	60.57%	70.86%	80.86%	90.86%	100.86%
2	Dimming Duty cycle	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
	Output Current	0A	0.033A	0.068A	0.104A	0.140A	0.176A	0.211A	0.248A	0.283A	0.319A	0.354A
	Percentage of rated current	0.00%	9.43%	19.43%	29.71%	40.00%	50.29%	60.29%	70.86%	80.86%	91.14%	101.14%


TEST RESULT: OK

INPUT FUNCTION TEST

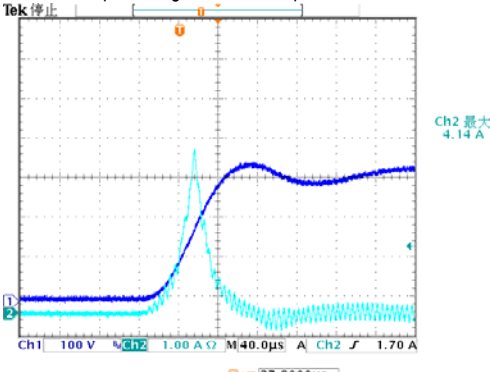
NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~295VAC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	87V~295V
			I/P: (1)LOW-LINE-3V=87 V HIGH-LINE+10V=305 V O/P: FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230VAC ON: 0.5 Sec OFF: 0.5 Sec 20MIN ( POWER ON/OFF NO DAMAGE )	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 90 VAC ~295 VAC O/P: FULL~MIN LOAD Ta: 25°C	TEST: OK
3	AC CURRENT	0.4A/115VAC 0.16A/230VAC 0.13A/277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	I =0.227A/ 115VAC I =0.133A/ 230VAC I =0.116A/ 277VAC
4	LEAKAGE CURRENT	< 0.75mA / 277VAC	I/P: 277 VAC O/P: NO LOAD Ta: 25°C	L-CASE: 0.0034 mA N-CASE: 0.0037 mA
5	NO LOAD POWER CONSUMPTION	< 0.5W for Blank-Type < 1.2W for A-Type	I/P: 230VAC O/P: NO LOAD Ta: 25°C	0.378W for Blank-Type 0.5542W for A-Type
6	INRUSH CURRENT(Typ)	230V/ 30A Twidth =100 us measured at 50% Ipeak COLD START	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I =4.14A/ 230VAC Twidth =31.2us
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1: AC Input Voltage CH2: Input current</p>  <p>Ch2 最大 4.14 A</p> <p>37.8000µs</p>				
7	EFFICIENCY(Typ)	82%	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	84.44%

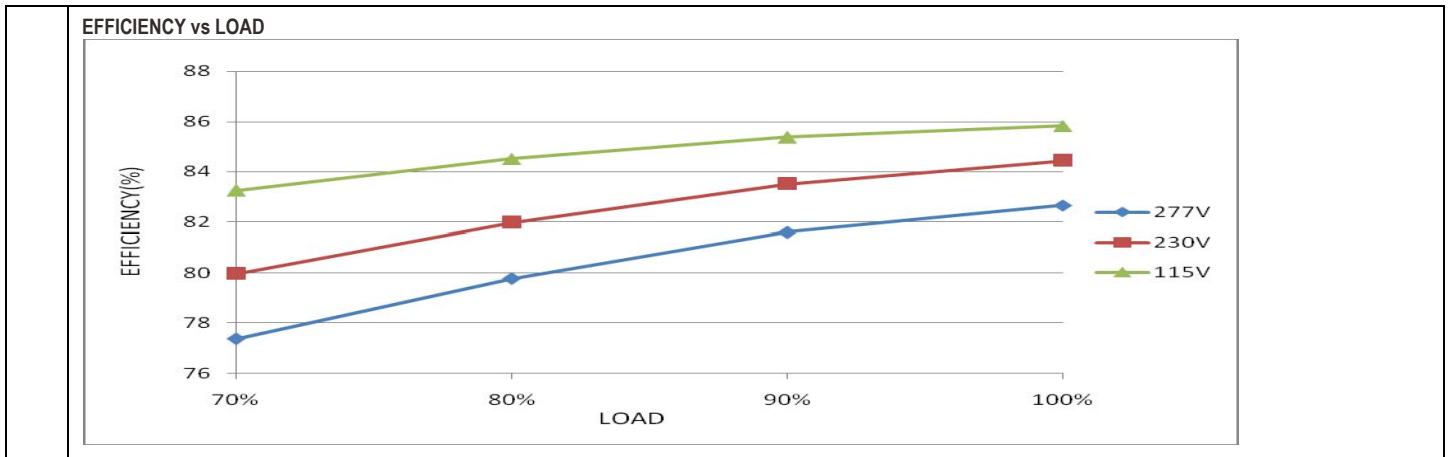

8	POWER FACTOR	0.95/ 115VAC	I/P: 115 VAC	PF=0.992/ 115VAC
		0.92/ 230VAC	I/P: 230 VAC	
		0.90/ 277VAC	I/P: 277 VAC	PF=0.9455/ 277VAC
			O/P: FULL LOAD	
			Ta: 25°C	

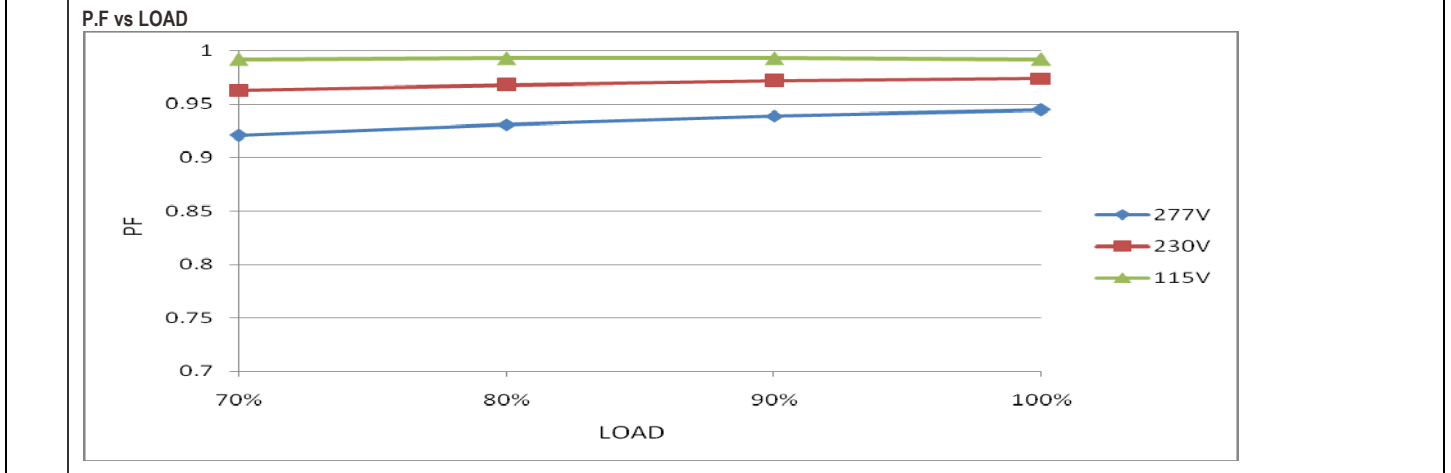

9	TOTAL HARMONIC DISTORTION	THD < 20%	I/P: 115 VAC/70% LOAD	THD=7.39% @70% load /115VAC
		( @load ≥ 70%/115VAC, 230VAC; @load ≥ 75%/277VAC )	I/P: 230 VAC/70% LOAD	
			I/P: 277 VAC/75% LOAD	THD=15.50% @75% load /277VAC
			Ta: 25°C	

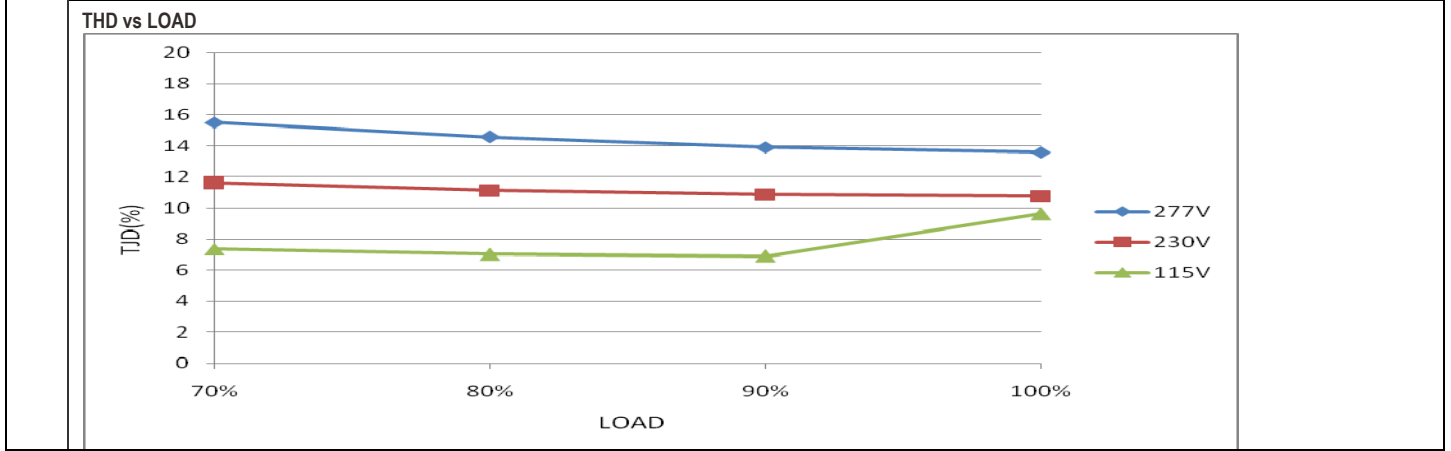

**PROTECTION FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	SHORT CIRCUIT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 90VAC I/P: 295VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup mode, recovers automatically after fault condition is removed

**COMPONENT STRESS TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q 1 Rated 7A/800V	I/P: High-Line +3V =298V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 550V (2) 532V (3) 546V
2	O/P Diode (MOSFET)	D100 Rated 5A/600V	I/P: High-Line +3V =298V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 514V (2) 510V (3) 512V
3	Control IC	U1 Rated 35V	I/P: High-Line +3V =298V O/P: (1) FULL LOAD (2) Output Short (3) Low Line No Load Ta: 25°C	(1) 14V (2) 11.1V (3) 14.1V
4	Clamp Diode	D 1 Rated 1A/1KV	I/P: High-Line +3V = 298V O/P: (1) Full Load input on/off (2) Output Short Ta: 25°C	(1) 518V (2) 524V

**SAFETY TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min	I/P-O/P: 4.2 KVAC/min Ta: 25°C	I/P-O/P: 1.744mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ	I/P-O/P: 500 VDC Ta: 25°C/70% RH	I/P-O/P: >9999MΩ

**E.M.C TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230 VAC/50HZ O/P: FULL/70% LOAD Ta: 25°C	PASS
2	CONDUCTION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
3	RADIATION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR: 8KV Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
6	SURGE	EN61000-4-5 LIGHT INDUSTRY L-N: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
7	Test by certified Lab & Test Report Prepare			

■ **RELIABILITY TEST**

**ENVIRONMENT TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																								
1	TEMPERATURE RISE TEST	MODEL: IDPC-25-350 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 28.5℃ 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 40.7℃																																																																										
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 38.5 ℃</th> <th>HIGH AMBIENT Ta=40.7 ℃</th> </tr> </thead> <tbody> <tr><td>1</td><td>LF1</td><td>40.5℃</td><td>52.6℃</td></tr> <tr><td>2</td><td>L1</td><td>44.8℃</td><td>56.8℃</td></tr> <tr><td>3</td><td>BD1</td><td>53.0℃</td><td>64.5℃</td></tr> <tr><td>4</td><td>Q1</td><td>61.6℃</td><td>73.5℃</td></tr> <tr><td>5</td><td>C20</td><td>61.6℃</td><td>72.7℃</td></tr> <tr><td>6</td><td>U1</td><td>57.2℃</td><td>68.7℃</td></tr> <tr><td>7</td><td>D2</td><td>63.2℃</td><td>77.4℃</td></tr> <tr><td>8</td><td>T1</td><td>69.5℃</td><td>80.1℃</td></tr> <tr><td>9</td><td>D100</td><td>65.3℃</td><td>76.1℃</td></tr> <tr><td>10</td><td>Q100</td><td>62.7℃</td><td>73.7℃</td></tr> <tr><td>11</td><td>U100</td><td>67.0℃</td><td>77.8℃</td></tr> <tr><td>12</td><td>D200</td><td>64.7℃</td><td>75.5℃</td></tr> <tr><td>13</td><td>C201</td><td>57.0℃</td><td>68.8℃</td></tr> <tr><td>14</td><td>RG1</td><td>79.4℃</td><td>90.2℃</td></tr> <tr><td>15</td><td>L100</td><td>62.8℃</td><td>74.6℃</td></tr> <tr><td>16</td><td>C106</td><td>56.4℃</td><td>67.7℃</td></tr> <tr><td>17</td><td>LF100</td><td>55.3℃</td><td>66.8℃</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 38.5 ℃	HIGH AMBIENT Ta=40.7 ℃	1	LF1	40.5℃	52.6℃	2	L1	44.8℃	56.8℃	3	BD1	53.0℃	64.5℃	4	Q1	61.6℃	73.5℃	5	C20	61.6℃	72.7℃	6	U1	57.2℃	68.7℃	7	D2	63.2℃	77.4℃	8	T1	69.5℃	80.1℃	9	D100	65.3℃	76.1℃	10	Q100	62.7℃	73.7℃	11	U100	67.0℃	77.8℃	12	D200	64.7℃	75.5℃	13	C201	57.0℃	68.8℃	14	RG1	79.4℃	90.2℃	15	L100	62.8℃	74.6℃	16	C106	56.4℃	67.7℃	17	LF100	55.3℃	66.8℃
NO	Position	ROOM AMBIENT Ta= 38.5 ℃	HIGH AMBIENT Ta=40.7 ℃																																																																									
1	LF1	40.5℃	52.6℃																																																																									
2	L1	44.8℃	56.8℃																																																																									
3	BD1	53.0℃	64.5℃																																																																									
4	Q1	61.6℃	73.5℃																																																																									
5	C20	61.6℃	72.7℃																																																																									
6	U1	57.2℃	68.7℃																																																																									
7	D2	63.2℃	77.4℃																																																																									
8	T1	69.5℃	80.1℃																																																																									
9	D100	65.3℃	76.1℃																																																																									
10	Q100	62.7℃	73.7℃																																																																									
11	U100	67.0℃	77.8℃																																																																									
12	D200	64.7℃	75.5℃																																																																									
13	C201	57.0℃	68.8℃																																																																									
14	RG1	79.4℃	90.2℃																																																																									
15	L100	62.8℃	74.6℃																																																																									
16	C106	56.4℃	67.7℃																																																																									
17	LF100	55.3℃	66.8℃																																																																									
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 295VAC/90VAC O/P: FULL/80% LOAD Ta= -25℃	TEST: OK																																																																								
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 ℃ NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta=50 ℃ HUMIDITY= 95 %R.H	TEST: OK																																																																								
4	TEMPERATURE COEFFICIENT	±0.03 %/℃(0~50℃)	I/P: 230 VAC O/P: FULL LOAD	±0.0093%/℃																																																																								
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature: -45℃~ +85℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition: AC OFF STATIC		TEST: OK																																																																								
6	THERMAL SHOCK TEST	1. Thermal shock Temperature: -25℃~ +55℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 16 CYCLE 5. Input/Output condition: 230VAC/Full Load AC ON/OFF TEST AC on 3 sec/AC off 1 sec TEST		TEST: OK																																																																								





7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 2G (5) Test Time: 60min in each axis (X.Y.Z) (6) Ta: 25°C	TEST: OK
8	CAPACITOR LIFE CYCLE	IDPC-25-350: SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta= 50 °C LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 50 °C LIFE TIME	(1) 328204 HRS (2) 61721.3 HRS (3) 62290.9 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 418.9K hrs min. MIL-HDBK-217F (25°C)	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	CHENZH/ZHUOKB	SKY	LIUWY