



Test Report: IDPC-65-1050

65W Constant Current Mode LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

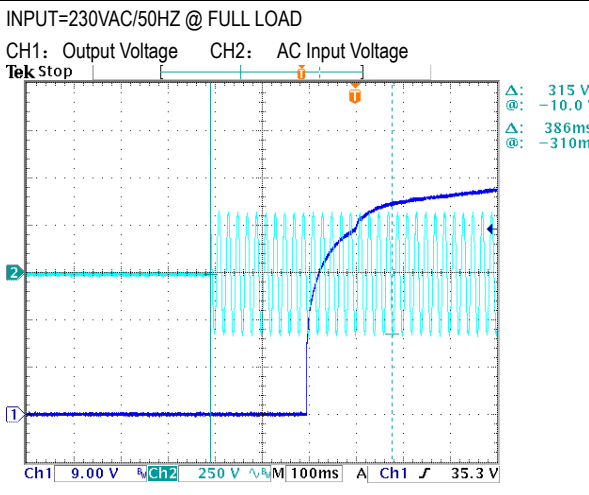
E.M.C. Test

■ RELIABILITY TEST

Environment Test

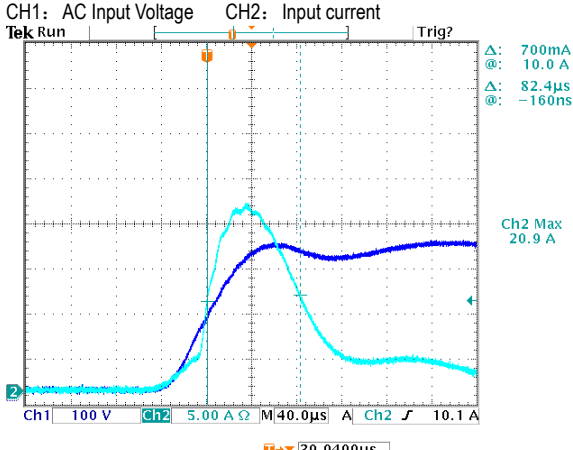
DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONSTANT CURRENT REGION	46V~62V	I/P: 230VAC O/P: LED MODE Ta: 25°C	36 V~62 V
2	CURRENT RIPPLE	5% max@rated current	I/P: 230VAC O/P: FULL/MIN LOAD Ta: 25°C	4.45%
3	CURRENT TOLERANCE	±7%	I/P: 230VAC O/P: FULL/MIN LOAD Ta: 25°C	±2.14%
4	OPEN CIRCUIT VOLTAGE (max)	82V	I/P: 230VAC O/P: NO LOAD Ta: 25°C	81.5 V
5	OVER/UNDERSHOOT TEST	<±5 %	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	<5 %
6	SET UP TIME	500ms/230VAC	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	386 ms/230VAC
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p> 				
7	AUXILIARY DC OUTPUT (For A-Type only)	Nominal 12V (deviation 11.4~12.6) @50mA	I/P: 230 VAC O/P: FULL LOAD	11.96 V

<p>8 DIMMING TEST (For Blank -Type)</p>	<ul style="list-style-type: none"> Output constant current level can be adjusted by applying one of the two methodologies between DIM+ and DIM-: 0 ~ 10Vdc, or 10V PWM signal. Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers. <p>© Applying additive 0 ~ 10VDC</p> <p>© Applying additive 10V PWM signal (frequency range 300Hz ~ 3KHz):</p> <div style="display: flex; justify-content: space-around;"> <div data-bbox="1069 347 1516 728"> </div> <div data-bbox="1069 739 1516 1142"> </div> </div> <p>Note:</p> <ol style="list-style-type: none"> Min. dimming level is about 8% and the output current is not defined when 0% < I_{out} < 8%. The output current could drop down to 0% when dimming input is about 0Vdc or 10V PWM signal with 0% duty cycle. <p>I/P: 230 VAC O/P: DIMMING TEST Ta: 25°C</p> <table border="1" data-bbox="295 1388 1500 1792"> <thead> <tr> <th></th> <th>V</th> <th>0V</th> <th>1V</th> <th>2V</th> <th>3V</th> <th>4V</th> <th>5V</th> <th>6V</th> <th>7V</th> <th>8V</th> <th>9V</th> <th>10V</th> </tr> </thead> <tbody> <tr> <td rowspan="2">1</td> <td>Output Current</td> <td>0A</td> <td>0.1319A</td> <td>0.2316A</td> <td>0.3297A</td> <td>0.4331A</td> <td>0.5341A</td> <td>0.6397A</td> <td>0.7438A</td> <td>0.8427A</td> <td>0.9474A</td> <td>1.0486A</td> </tr> <tr> <td>%</td> <td>0.00%</td> <td>12.56%</td> <td>22.06%</td> <td>31.40%</td> <td>41.25%</td> <td>50.87%</td> <td>60.92%</td> <td>70.84%</td> <td>80.26%</td> <td>90.23%</td> <td>99.87%</td> </tr> <tr> <td rowspan="3">2</td> <td>PWM(100Hz)</td> <td>0%</td> <td>10%</td> <td>20%</td> <td>30%</td> <td>40%</td> <td>50%</td> <td>60%</td> <td>70%</td> <td>80%</td> <td>90%</td> <td>100%</td> </tr> <tr> <td>Output Current</td> <td>0A</td> <td>0.1375A</td> <td>0.2341A</td> <td>0.3302A</td> <td>0.4335A</td> <td>0.5336A</td> <td>0.6396A</td> <td>0.7447A</td> <td>0.8455A</td> <td>0.9511A</td> <td>1.0545A</td> </tr> <tr> <td>%</td> <td>0.00%</td> <td>13.10%</td> <td>22.30%</td> <td>31.45%</td> <td>41.29%</td> <td>50.82%</td> <td>60.91%</td> <td>70.92%</td> <td>80.52%</td> <td>90.58%</td> <td>100.43%</td> </tr> </tbody> </table> <p>TEST RESULT: OK</p>		V	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	1	Output Current	0A	0.1319A	0.2316A	0.3297A	0.4331A	0.5341A	0.6397A	0.7438A	0.8427A	0.9474A	1.0486A	%	0.00%	12.56%	22.06%	31.40%	41.25%	50.87%	60.92%	70.84%	80.26%	90.23%	99.87%	2	PWM(100Hz)	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	Output Current	0A	0.1375A	0.2341A	0.3302A	0.4335A	0.5336A	0.6396A	0.7447A	0.8455A	0.9511A	1.0545A	%	0.00%	13.10%	22.30%	31.45%	41.29%	50.82%	60.91%	70.92%	80.52%	90.58%	100.43%
	V	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V																																																																
1	Output Current	0A	0.1319A	0.2316A	0.3297A	0.4331A	0.5341A	0.6397A	0.7438A	0.8427A	0.9474A	1.0486A																																																																
	%	0.00%	12.56%	22.06%	31.40%	41.25%	50.87%	60.92%	70.84%	80.26%	90.23%	99.87%																																																																
2	PWM(100Hz)	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%																																																																
	Output Current	0A	0.1375A	0.2341A	0.3302A	0.4335A	0.5336A	0.6396A	0.7447A	0.8455A	0.9511A	1.0545A																																																																
	%	0.00%	13.10%	22.30%	31.45%	41.29%	50.82%	60.91%	70.92%	80.52%	90.58%	100.43%																																																																
<p>9 DALI DIMMING OPERATION (primary side; for DA-Type)</p>	<p>※DALI Interface</p> <ul style="list-style-type: none"> Apply DALI signal between DA+ and DA-. DALI protocol comprises 16 groups and 64 addresses. First step is fixed at 8% of output. <p>I/P: 230 VAC O/P: DIMMING TEST Ta: 25°C TEST RESULT: OK</p>																																																																											

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	180VAC~295VAC	I/P: TESTING O/P: 80%/FULL LOAD Ta: 25°C	177V~305V
			I/P: (1)LOW-LINE-3V=177 V HIGH-LINE+10V=305 V O/P: 80%/FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230VAC ON: 0.5 Sec OFF: 0.5 Sec 20MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 180 VAC ~295 VAC O/P: FULL~MIN LOAD Ta: 25°C	TEST: OK
3	AC CURRENT	0.4A/230VAC 0.3A/277VAC	I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	I =0.323A/ 230VAC I =0.261A/ 277VAC
4	LEAKAGE CURRENT	< 0.75mA / 277VAC	I/P: 277 VAC O/P: NO LOAD Ta: 25°C	L-CASE: 0.0029 mA N-CASE: 0.0029 mA
5	NO LOAD/STANDBY POWER CONSUMPTION	< 0.5W for Blank-Type < 1.2W for A-Type < 0.5W for DA-Type	I/P: 230VAC O/P: NO LOAD Ta: 25°C	0.398W for Blank-Type 0.592W for A-Type 0.465W for DA-Type
6	INRUSH CURRENT(Typ)	230V/ 30A Twidth =100 us measured at 50% Ipeak COLD START	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I =20.9A/ 230VAC Twidth =82.4 us
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1: AC Input Voltage CH2: Input current</p>  <p>Ch1 100 V Ch2 5.00 A Ω 40.0μs A Ch2 10.1 A</p> <p>39.0400μs</p>				
7	EFFICIENCY(Typ)	87%	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	88.95%

<p>EFFICIENCY vs LOAD</p> <table border="1"> <caption>Efficiency vs Load Data</caption> <thead> <tr> <th>LOAD</th> <th>277V Efficiency (%)</th> <th>230V Efficiency (%)</th> </tr> </thead> <tbody> <tr><td>50%</td><td>86.0</td><td>86.5</td></tr> <tr><td>60%</td><td>86.5</td><td>87.0</td></tr> <tr><td>70%</td><td>87.0</td><td>87.5</td></tr> <tr><td>80%</td><td>87.5</td><td>88.0</td></tr> <tr><td>90%</td><td>88.0</td><td>88.5</td></tr> <tr><td>100%</td><td>88.5</td><td>89.0</td></tr> </tbody> </table>				LOAD	277V Efficiency (%)	230V Efficiency (%)	50%	86.0	86.5	60%	86.5	87.0	70%	87.0	87.5	80%	87.5	88.0	90%	88.0	88.5	100%	88.5	89.0
LOAD	277V Efficiency (%)	230V Efficiency (%)																						
50%	86.0	86.5																						
60%	86.5	87.0																						
70%	87.0	87.5																						
80%	87.5	88.0																						
90%	88.0	88.5																						
100%	88.5	89.0																						
8	POWER FACTOR	0.95/ 230VAC 0.90/ 277VAC	I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	PF=0.982/ 230VAC PF=0.956/ 277VAC																				
<p>P.F vs LOAD</p> <table border="1"> <caption>P.F vs Load Data</caption> <thead> <tr> <th>LOAD</th> <th>277V PF</th> <th>230V PF</th> </tr> </thead> <tbody> <tr><td>50%</td><td>0.91</td><td>0.95</td></tr> <tr><td>60%</td><td>0.92</td><td>0.96</td></tr> <tr><td>70%</td><td>0.93</td><td>0.965</td></tr> <tr><td>80%</td><td>0.94</td><td>0.97</td></tr> <tr><td>90%</td><td>0.95</td><td>0.975</td></tr> <tr><td>100%</td><td>0.96</td><td>0.98</td></tr> </tbody> </table>				LOAD	277V PF	230V PF	50%	0.91	0.95	60%	0.92	0.96	70%	0.93	0.965	80%	0.94	0.97	90%	0.95	0.975	100%	0.96	0.98
LOAD	277V PF	230V PF																						
50%	0.91	0.95																						
60%	0.92	0.96																						
70%	0.93	0.965																						
80%	0.94	0.97																						
90%	0.95	0.975																						
100%	0.96	0.98																						
9	TOTAL HARMONIC DISTORTION	THD < 20% (@load ≥ 75% 230VAC; @load ≥ 75% 277VAC)	I/P: 230 VAC/75% LOAD I/P: 277 VAC/75% LOAD Ta: 25°C	THD=6.10% @75% load /230VAC THD=7.92% @75% load /277VAC																				
<p>THD vs LOAD</p> <table border="1"> <caption>THD vs Load Data</caption> <thead> <tr> <th>LOAD</th> <th>277V THD (%)</th> <th>230V THD (%)</th> </tr> </thead> <tbody> <tr><td>50%</td><td>8.5</td><td>7.0</td></tr> <tr><td>60%</td><td>8.2</td><td>6.5</td></tr> <tr><td>70%</td><td>7.8</td><td>6.2</td></tr> <tr><td>80%</td><td>7.5</td><td>5.8</td></tr> <tr><td>90%</td><td>7.2</td><td>5.4</td></tr> <tr><td>100%</td><td>6.8</td><td>5.0</td></tr> </tbody> </table>				LOAD	277V THD (%)	230V THD (%)	50%	8.5	7.0	60%	8.2	6.5	70%	7.8	6.2	80%	7.5	5.8	90%	7.2	5.4	100%	6.8	5.0
LOAD	277V THD (%)	230V THD (%)																						
50%	8.5	7.0																						
60%	8.2	6.5																						
70%	7.8	6.2																						
80%	7.5	5.8																						
90%	7.2	5.4																						
100%	6.8	5.0																						

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	SHORT CIRCUIT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 180VAC I/P: 295VAC O/P: 80%/FULL LOAD Ta: 25°C	NO DAMAGE Hiccup mode, auto-recovery after fault condition is removed for DA type; Hiccup mode, re-power on to recovery for other type

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q 1 Rated 800V/9A	I/P: High-Line +3V =298V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 690V (2) 644V (3) 680V
2	O/P Diode (MOSFET)	D100 Rated 16A/600V	I/P: High-Line +3V =298V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 460V (2) 468V (3) 404V
3	Control IC	U1 Rated 35V (MAX)	I/P: High-Line +3V =298V O/P: (1) FULL LOAD (2) Output Short (3)Low Line No Load Ta: 25°C	(1) 15.7V (2) 14.5V (3) 15.5V
4	Clamp Diode	D 1 Rated 800V/2A	I/P: High-Line +3V = 298V O/P: (1) Full Load input on/off (2) Output Short Ta: 25°C	(1) 550V (2) 494V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min	I/P-O/P: 4.2 KVAC/min Ta: 25°C	I/P-O/P: 1.624 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ	I/P-O/P: 500 VDC Ta: 25°C/70% RH	I/P-O/P: > 9999 MΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230 VAC/50HZ O/P: FULL/75% LOAD Ta: 25°C	PASS
2	CONDUCTION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR: 8KV Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
6	SURGE	EN61000-4-5 LIGHT INDUSTRY L-N: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

■ **RELIABILITY TEST**

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																								
1	TEMPERATURE RISE TEST	MODEL: IDPC-65-1050 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 30.9℃ 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 41.1℃																																																										
		<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 30.9 ℃</th> <th>HIGH AMBIENT Ta=41.1 ℃</th> </tr> </thead> <tbody> <tr><td>1</td><td>BD1</td><td>76.3℃</td><td>87.6℃</td></tr> <tr><td>2</td><td>C8</td><td>71.9℃</td><td>83.4℃</td></tr> <tr><td>3</td><td>Q1</td><td>80.5℃</td><td>92.0℃</td></tr> <tr><td>4</td><td>D1</td><td>89.2℃</td><td>101.2℃</td></tr> <tr><td>5</td><td>U1</td><td>72.9℃</td><td>83.7℃</td></tr> <tr><td>6</td><td>T1</td><td>83.5℃</td><td>94.9℃</td></tr> <tr><td>7</td><td>RG1</td><td>82.5℃</td><td>92.8℃</td></tr> <tr><td>8</td><td>D100</td><td>77.4℃</td><td>88.2℃</td></tr> <tr><td>9</td><td>Q100</td><td>74.3℃</td><td>85.3℃</td></tr> <tr><td>10</td><td>L100</td><td>82.8℃</td><td>94.3℃</td></tr> <tr><td>11</td><td>C106</td><td>70.5℃</td><td>81.1℃</td></tr> <tr><td>12</td><td>C110</td><td>57.3℃</td><td>68.0℃</td></tr> <tr><td>13</td><td>U100</td><td>76.4℃</td><td>87.0℃</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 30.9 ℃	HIGH AMBIENT Ta=41.1 ℃	1	BD1	76.3℃	87.6℃	2	C8	71.9℃	83.4℃	3	Q1	80.5℃	92.0℃	4	D1	89.2℃	101.2℃	5	U1	72.9℃	83.7℃	6	T1	83.5℃	94.9℃	7	RG1	82.5℃	92.8℃	8	D100	77.4℃	88.2℃	9	Q100	74.3℃	85.3℃	10	L100	82.8℃	94.3℃	11	C106	70.5℃	81.1℃	12	C110	57.3℃	68.0℃	13	U100	76.4℃	87.0℃		
NO	Position	ROOM AMBIENT Ta= 30.9 ℃	HIGH AMBIENT Ta=41.1 ℃																																																									
1	BD1	76.3℃	87.6℃																																																									
2	C8	71.9℃	83.4℃																																																									
3	Q1	80.5℃	92.0℃																																																									
4	D1	89.2℃	101.2℃																																																									
5	U1	72.9℃	83.7℃																																																									
6	T1	83.5℃	94.9℃																																																									
7	RG1	82.5℃	92.8℃																																																									
8	D100	77.4℃	88.2℃																																																									
9	Q100	74.3℃	85.3℃																																																									
10	L100	82.8℃	94.3℃																																																									
11	C106	70.5℃	81.1℃																																																									
12	C110	57.3℃	68.0℃																																																									
13	U100	76.4℃	87.0℃																																																									
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 295VAC/180VAC O/P: FULL/80% LOAD Ta= -25℃	TEST: OK																																																								
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 40 ℃ NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta=40 ℃ HUMIDITY= 95 %R.H	TEST: OK																																																								
4	TEMPERATURE COEFFICIENT	±0.03 %/℃(0~40℃)	I/P: 230 VAC O/P: FULL LOAD	±0.0009%/℃																																																								
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature: -45℃~ +85℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition: AC OFF STATIC		TEST: OK																																																								
6	THERMAL SHOCK TEST	1. Thermal shock Temperature: Ta=-25℃~ +45℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 16 CYCLE 5. Input/Output condition: 230VAC/Full Load AC ON/OFF TEST AC on 3 sec/AC off 1 sec TEST		TEST: OK																																																								



7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 2G (5) Test Time: 60min in each axis (X.Y.Z) (6) Ta: 25°C	TEST: OK
8	CAPACITOR LIFE CYCLE	IDPC-65-1050: SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta= 40 °C LIFE TIME (3) I/P: 230VAC O/P: MIN LOAD Ta= 40 °C LIFE TIME	(1) 555043 HRS (2) 190880 HRS (3) 220009 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 380.7K hrs min MIL-HDBK-217F (25°C)	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Carychen/ZHUOKB	SKY	LIUWY